



**HIGH QUALITY
LIGHTINGS**

WALL LIGHT


LAWN LIGHT

SPOT LIGHT

 0046762415161

 www.nexleds.se

 info@nexleds.se

<p>Wall light</p>	 NX19301 P02	 NX19302/NX19303 P03	 NX19304 P04	 NX19305 P05	 NX19306 P06
 NX19307 P07	 NX19308 P08	 NX19310/NX19311 P09	 NX19312/NX19313 P10	 NX19504 P11	 NX19604 P12
 NX19608 P13	 NX19703 P14	 NX18201 P17	 NX18202 P18	 NX18203 P19	 NX18204 P20
 NX18205 P21	 NX18207 P22	 NX18208 P23	 NX18209 P24	 NX18304 P25	 NX18404 P26
 NX17101 P27	 NX17102 P28	 NX17103 P29	 NX17104 P30	 NX17105 P31	 NX17106/NX17107 P32
 NX17201 P33	 NX17202 P34	 NX17203 P35	 NX17206 P36	 NX17208 P37	 NX17210 P38
 NX17211 P39	 NX17212 P40	 NX17301/NX17302 P41	 NX17303/NX17304 P42	 NX17404 P43	 NX17404 P45

 NX13307 P91	 NX13403/NX13404 P92	 NX13405/NX13406 P93	 NX13503/NX13504 P94	 NX13505-NX13508 P95	 NX13604 P96
 NX13704 P97	 NX13804 P98	 NX12104 P99	 NX12207 P101	 NX12307 P103	 NX12404 P104
 NX12508 P105	 NX12601/NX12602 P106	 NX12603/NX12604 P107	 NX11207 P109	 NX11307 P110	 NX11404 P111
 NX11408 P112	 NX116010 P114	Lawn light	 NX1950 P11	 NX1960 P12	 NX1960 P13
 NX1970 P14	 NX1990 P15	 NX1830 P25	 NX1840 P26	 NX1740 P43	 NX1750 P44
 NX1760 P45	 NX1770 P46	 NX1640 P55	 NX1650 P56	 NX1640 P57	 NX1540 P68
 NX1550 P69	 NX1560 P70	 NX1570 P71	 NX1430 P77	 NX1430 P78	 NX1430 P79



NX16101/NX16102 P47



NX16103 P48



NX16104 P49



NX16105 P50



NX16106 P51



NX16107 P52



NX16108 53



NX16201 P54



NX14604 P55



NX16504 P54



NX16604 P57



NX15101 P58



NX15102 P59



NX15103 P60



NX15104 P61



NX15105 P62



NX15106 P63



NX15107 P64



NX15108-NX15110 P65



NX15405 P68



NX15504 P69



NX15604 P70



NX15704 P71



NX14101 P72



NX14105-NX14108 P73



NX14109-NX14111 P74



NX14203/NX14204 P75



NX14205-NX14208 P76



NX14304 P77



NX14308 P78



NX14312 P79



NX14404 P80



NX14408 P81



NX14504 P82



NX14604 P83



NX13101 P84



NX13105/NX13106 P85




NX13107 P86



NX13201 P87



NX13301 P88















NX13305 P89



NX13306 P90



Spot light





NX1910/NX1920 Series



Lighting Technology
Luminaires with LED
with LED integral power supply unit

Material
Die-casting Aluminium; PC; Diffuser

Body color
Black, Dark Gray, Sliver Gray

Certification







 ISO9001-2015 ISO14000  BSCI

TEMPERATURE
2700K
6500K

IP65

Beam Angle
14°

Beam Angle
25°

Beam Angle
40°

Beam Angle
60°

	Lamp	Lumen	A	B	C
NX19101	LED 12W	1000LM	98	108	125
NX19102	LED 12W	1000LM	98	114	314
NX19103	LED 12W	1000LM	131	152	600
NX19201	LED 20W	1800LM	122	131	158
NX19202	LED 20W	1800LM	122	138	486
NX19203	LED 20W	1800LM	131	174	600
NX19204	GU10 Max.20W	-	122	131	158
NX19205	GU10 Max.20W	-	122	138	486
NX19206	GU10 Max.20W	-	131	174	600

NX19301



Lighting Technology
Luminaires with LED
with LED integral power supply unit

Material
Die-casting Aluminium; PC; Diffuser

Body color
Black, Dark Gray, Sliver Gray

Certification






 ISO9001-2015 ISO14000  BSCI

LED
13 W
TEMPERATURE
2700K
6500K

MAX.
1200
LUMENS
IP65



	Lamp	Lumen	A	B	C
NX19301	LED 13W	1200LM	230	82	81



NX19302/NX19303



Lighting Technology
Luminaires with LED
with LED integral power supply unit

Material
Die-casting Aluminium; PC; Diffuser

Body color
Black, Dark Gray, Sliver Gray


Certification






 ISO9001-2015 ISO14000  BSCI


LED 13 ^W	TEMPERATURE 2700K - 6500K
MAX. 1200 LUMENS	IP65

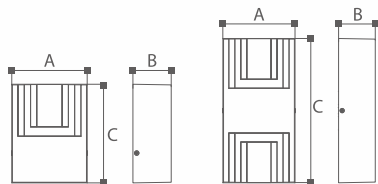

	Lamp	Lumen	A	B	C
NX19302	LED 7W	600LM	120	61	157
NX19303	LED 13W	1200LM	120	61	240



NX19304

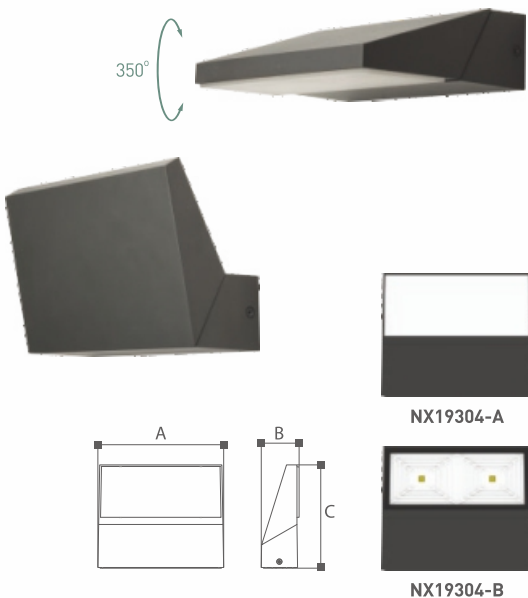

Lighting Technology
Luminaires with LED
with LED integral power supply unit

Material
Die-casting Aluminium; PC; Diffuser

Body color
Black, Dark Gray, Sliver Gray

Certification






 ISO9001-2015 ISO14000  BSCI


LED
13 W
TEMPERATURE
2700K
6500K

MAX.
1200
LUMENS
IP65

	Lamp	Lumen	A	B	C
NX19304-A	LED 13W	1200LM	172	52	141
NX19304-B	LED 11W	1100LM	172	52	141



NX19305



Lighting Technology

Luminaires with LED
with LED integral power supply unit

Material

Die-casting Aluminium; PC; Diffuser

Body color

Black, Dark Gray, Silver Gray

Certification

CE CB ETL SAA VDE BIS
ISO9001-2015 ISO14000 BSCI

LED
7 W
TEMPERATURE
2700K
6500K


MAX.
650
LUMENS
IP65

Lamp	Lumen	A	B	C
NX19305	LED 7W	650LM	75	49 270

NEXLEDS
Products Of Sweden



NX19306



Lighting Technology
Luminaires with LED
with LED integral power supply unit

Material
Die-casting Aluminium; PC; Diffuser

Body color
Black, Dark Gray, Sliver Gray

Certification








 ISO9001-2015 ISO14000  BSCI

LED 3.5 W	TEMPERATURE 2700K 6500K
MAX. 270 LUMENS	IP65

	Lamp	Lumen	A	B	C
NX19306	LED 3.5W	270LM	171	75	57

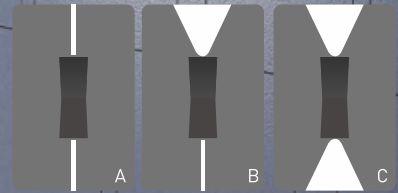

NX19307



Lighting Technology
Luminaires with LED
with LED integral power supply unit

Material
Die-casting Aluminium; PC; Diffuser

Body color
Black, Dark Gray, Sliver Gray

Certification






 ISO9001-2015 ISO14000  BSCI

LED 7 W	TEMPERATURE 2700K - 6500K
MAX. 600 LUMENS	IP65

Lamp	Lumen	A	B	C
NX19307	LED 7W	600LM	240	75 57



NX19308



Lighting Technology
Luminaires with LED
with LED integral power supply unit

Material
Die-casting Aluminium; PC; Diffuser

Body color
Black, Dark Gray, Sliver Gray

Certification







 ISO9001-2015 ISO14000  BSCI

LED
30 W
TEMPERATURE
2700K
6500K

MAX.
3000
LUMENS
IP65

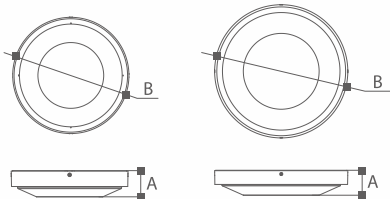

	Lamp	Lumen	A	B
NX19308	LED 20W	2000LM	60	250
NX19309	LED 30W	3000LM	60	320



NX19310/NX19311



NX19310



NX19311

Lighting Technology
Luminaires with LED
with LED integral power supply unit

Material
Die-casting Aluminium; PC; Diffuser

Body color
Black, Dark Gray, Sliver Gray

Certification







 ISO9001-2015 ISO14000  BSCI

LED
20 W

TEMPERATURE
2700K
6500K

MAX.
1800
LUMENS

IP65

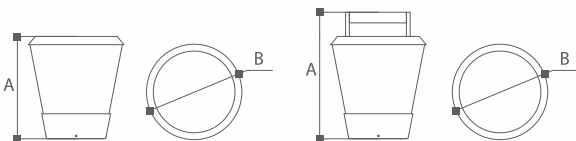

	Lamp	Lumen	A	B
NX19310	LED 20W	1800LM	322	300
NX19311	LED 20W	1800LM	400	300



NX19312/NX19313



NX19312



NX19313

Lighting Technology
Luminaires with LED
with LED integral power supply unit

Material
Die-casting Aluminium; PC; Diffuser


Body color
Black, Dark Gray, Sliver Gray

Certification







 ISO9001-2015 ISO14000  BSCI

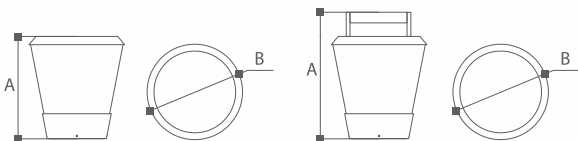

	Lamp	A	B
NX19312	E27 23W	322	300
NX19313	E27 23W	400	300



NX1950 Series

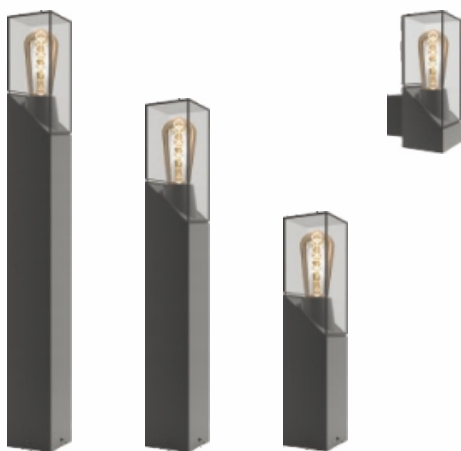

Lighting Technology
Luminaires with LED
with LED integral power supply unit

E27
23W IP54

Material
Die-casting Aluminium; PC; Diffuser


Body color
Black, Dark Gray, Sliver Gray

Certification






 ISO9001-2015 ISO14000  BSCI

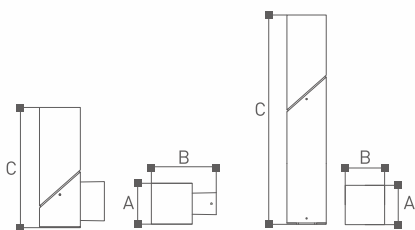

	Lamp	A	B	C
NX19501	E27 Max. 23W	85	85	400
NX19502	E27 Max. 23W	85	85	600
NX19503	E27 Max. 23W	85	85	800
NX19504	E27 Max. 23W	85	135	250



NX1960 Series



Lighting Technology
Luminaires with LED
with LED integral power supply unit

Material
Die-casting Aluminium; PC; Diffuser

Body color
Black, Dark Gray, Sliver Gray


Certification






 ISO9001-2015 ISO14000  BSCI

E27
23W IP54

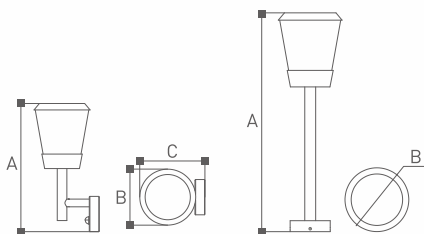

	Lamp	A	B	C
NX19601	E27 Max. 23W	600	175	175
NX19602	E27 Max. 23W	800	175	175
NX19603	E27 Max. 23W	1000	175	175
NX19604	E27 Max. 23W	400	175	204
NX19604S	E27 Max. 23W	400	175	204



NX1960 Series



Lighting Technology
Luminaires with LED
with LED integral power supply unit

Material
Die-casting Aluminium; PC; Diffuser

Body color
Black, Dark Gray, Sliver Gray

Certification








 ISO9001-2015 ISO14000  BSCI

LED 13 W	TEMPERATURE 2700K 6500K
MAX. 1200 LUMENS	IP65

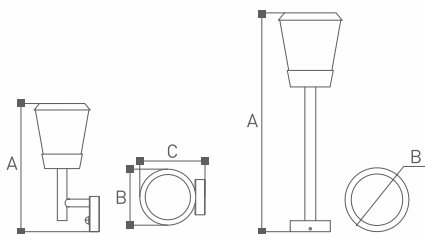

	Lamp	Lumen	A	B	C
NX19605	LED 13W	1200LM	600	175	175
NX19606	LED 13W	1200LM	800	175	175
NX19607	LED 13W	1200LM	1000	175	175
NX19608	LED 13W	1200LM	400	175	204
NX19608S	LED 13W	1200LM	400	175	204



NX1970 Series



Lighting Technology
Luminaires with LED
with LED integral power supply unit

Material
Die-casting Aluminium; PC; Diffuser

Body color
Black, Dark Gray, Sliver Gray

Certification








 ISO9001-2015 ISO14000  BSCI

LED 13W	TEMPERATURE 2700K - 6500K
MAX. 1200 LUMENS	IP65

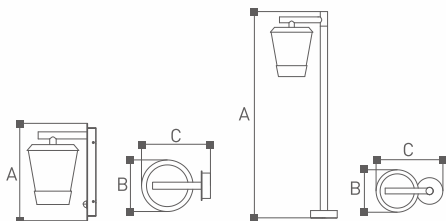

	Lamp	Lumen	A	B	C
NX19701	LED 13W	1200LM	1000	175	276
NX19702	LED 13W	1200LM	1400	175	276
NX19703	LED 13W	1200LM	330	175	234
NX19703S	LED 13W	1200LM	330	175	234



NX1990 Series



Lighting Technology
Luminaires with LED
with LED integral power supply unit

Material
Aluminium extruded sections; Die-casting
Aluminium; PC

Body color
Black, Dark Gray, Sliver Gray

Certification








 ISO9001-2015 ISO14000  BSCI

LED
7W

TEMPERATURE
2700K
6500K

MAX.
650
LUMENS

IP65



	Lamp	Lumen	A	B	C
NX19901	LED 7W	650LM	600	90	140
NX19902	LED 7W	650LM	800	90	140
NX19903	LED 7W	650LM	1000	90	140



NX1810 Series



Lighting Technology

Luminaires with GU10 lamp holder fixed with energy saving lighting Max.20W



Material

Die-casting Aluminium; Tempered Glass

Body color

Black, Dark Gray, Sliver Gray


Certification








 ISO9001-2015 ISO14000 

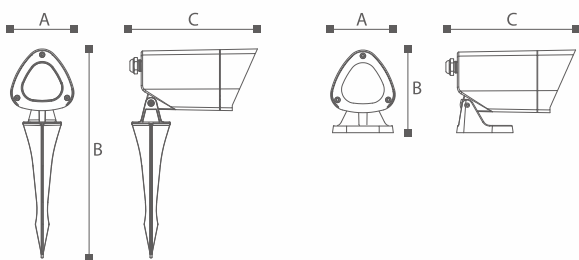

	Lamp	A	B	C
NX18101	GU10 Max. 20W	89	114	179
NX18102	GU10 Max. 20W	89	294	179



NX18201

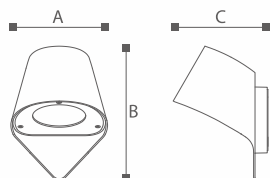

Lighting Technology

Luminaires with GU10 lamp holder fixed with energy saving lighting Max.35W



Material

Die-casting Aluminium; Tempered Glass

Body color

Black, Dark Gray, Sliver Gray


Certification

CE CB ENEC SAA VDE BIS
ISO9001-2015 ISO14000 BSCI

	Lamp	A	B	C
NX18201	GU10 Max. 35W	134	187	132



NX18202

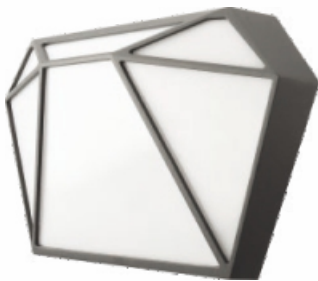

Lighting Technology
Luminaires with LED
with LED integral power supply unit

Material
Die-casting Aluminium; PC; Diffuser

Body color
Black, Dark Gray, Sliver Gray

Certification







 ISO9001-2015 ISO14000  BSCI

LED
10 W
TEMPERATURE
2700K
6500K

MAX.
1200
LUMENS
IP65



	Lamp	Lumen	A	B	C
NX18202	LED 10W	1200LM	240	129	56



NX18203



Lighting Technology
Luminaires with LED
with LED integral power supply unit

Material
Die-casting Aluminium; PC; Diffuser

Body color
Black, Dark Gray, Silver Gray

Certification







 ISO9001-2015 ISO14000  BSCI

LED
10 W
TEMPERATURE
2700K
6500K

MAX.
1200
LUMENS
IP65



	Lamp	Lumen	A	B	C
NX18203	LED 10W	1200LM	240	129	58



NX18204



NX18204

NX18204S

Lighting Technology
Luminaires with LED
with LED integral power supply unit

Material
Die-casting Aluminium; PC; Diffuser

Body color
Black, Dark Gray, Sliver Gray

Certification







 ISO9001-2015 ISO14000  BSCI

LED
13W
TEMPERATURE
2700K
6500K

MAX.
1200
LUMENS
IP65

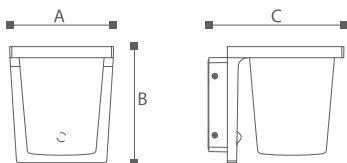

	Lamp	Lumen	A	B	C
NX18204	LED 13W	1200LM	141	157	184
NX18204S	LED 13.5W	1200LM	141	157	184



NX18205



Lighting Technology
Luminaires with LED
with LED integral power supply unit

Material
Die-casting Aluminium; PC; Diffuser

Body color
Black, Dark Gray, Silver Gray

Certification







 ISO9001-2015 ISO14000  BSCI

LED
13W

TEMPERATURE
2700K
6500K

MAX.
1200
LUMENS

IP65

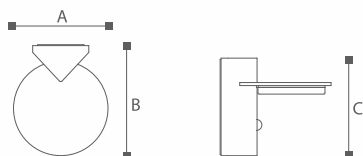

	Lamp	Lumen	A	B	C
NX18205	LED 13W	1200LM	155	182	160
NX18205S	LED 7W	650LM	155	182	171



NX18207



Lighting Technology
Luminaires with LED
with LED integral power supply unit

Material
Die-casting Aluminium; PC; Diffuser

Body color
Black, Dark Gray, Sliver Gray

Certification







 ISO9001-2015 ISO14000  BSCI

LED
13 W
TEMPERATURE
2700K
6500K


MAX.
1200
LUMENS
IP65



	Lamp	Lumen	A	B	C
NX18207	LED 13W	1200LM	265	139	90



NX18208



Lighting Technology
Luminaires with LED
with LED integral power supply unit

Material
Die-casting Aluminium; Tempered Glass

Body color
Black, Dark Gray, Sliver Gray

Certification






 ISO9001-2015 ISO14000  BSCI


LED
11 W
TEMPERATURE
2700K
6500K

MAX.
1100
LUMENS
IP65

	Lamp	Lumen	A	B	C
NX18208	LED 11W	1000LM	210	46	210



NX18209



Lighting Technology
Luminaires with LED
with LED integral power supply unit

Material
Die-casting Aluminium; Tempered Glass

Body color
Black, Dark Gray, Silver Gray

Certification

CE CB    BIS
ISO9001-2015 ISO14000 

LED
11 W
TEMPERATURE
2700K
6500K

MAX.
1100
LUMENS
IP65

	Lamp	Lumen	A	B	C
NX18209	LED 11W	1000LM	80	40	260



NX1830 Series



Lighting Technology

Luminaire with E27 lamp holder fixed with energy saving lighting Max.23W



Material


Aluminium extruded sections; Die-casting Aluminium; PC

Body color

Black, Dark Gray, Silver Gray

Certification

CE CB SAA BIS
ISO9001-2015 ISO14000 BSCI

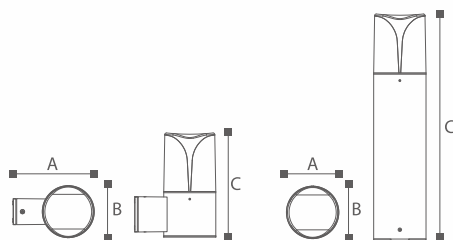

	Lamp	A	B	C
NX18301	E27 Max. 23W	90	90	300
NX18302	E27 Max. 23W	90	90	500
NX18303	E27 Max. 23W	90	90	800
NX18304	E27 Max. 23W	141	90	180



NX1840 Series



Lighting Technology
Luminaires with LED
with LED integral power supply unit

Material
Aluminium extruded sections; Die-casting
Aluminium; PC

Body color
Black, Dark Gray, Silver Gray

Certification







 ISO9001-2015 ISO14000  BSCI

LED
13W
TEMPERATURE
2700K
6500K


MAX.
1200
LUMENS
IP65

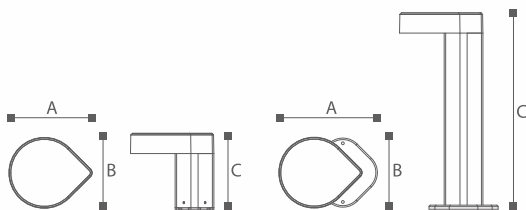

	Lamp	Lumen	A	B	C
NX18401	LED 13W	1200LM	195	140	300
NX18402	LED 13W	1200LM	195	140	500
NX18403	LED 13W	1200LM	195	140	800
NX18404	LED 13W	1200LM	165	140	150



NX17101

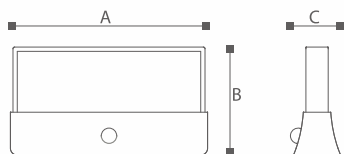

Lighting Technology
Luminaires with LED
with LED integral power supply unit

Material
Die-casting Aluminium; PC; Diffuser

Body color
Black, Dark Gray, Sliver Gray

Certification






 ISO9001-2015 ISO14000  BSCI

LED 13 W	TEMPERATURE 2700K - 6500K
MAX. 1200 LUMENS	IP65

	Lamp	Lumen	A	B	C
NX17101	LED 13W	1200LM	232	135	70
NX17101S	LED 13.5W	1200LM	232	135	73



NX17102



Lighting Technology
Luminaires with LED
with LED integral power supply unit

Material
Die-casting Aluminium; PC; Diffuser

Body color
Black, Dark Gray, Sliver Gray

Certification







 ISO9001-2015 ISO14000  BSCI

LED
10 W
TEMPERATURE
2700K
6500K

MAX.
850
LUMENS
IP65

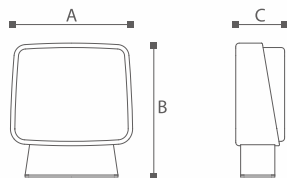

	Lamp	Lumen	A	B	C
NX17102	LED 10W	850LM	125	137	50



NX17103



Lighting Technology

Luminaires with LED with LED integral power supply unit

Material

Die-casting Aluminium; PC; Diffuser

Body color

Black, Dark Gray, Silver Gray

Certification









 ISO9001-2015 ISO14000  BSCI

LED
13 W
TEMPERATURE
2700K
6500K

MAX.
1200
LUMENS
IP65



	Lamp	Lumen	A	B	C
NX17103	LED 13W	1200LM	227	97	65



NX17104



Lighting Technology
Luminaires with LED
with LED integral power supply unit

Material
Die-casting Aluminium; PC; Diffuser

Body color
Black, Dark Gray, Sliver Gray


Certification






 ISO9001-2015 ISO14000  BSCI

LED 13 W	TEMPERATURE 2700K - 6500K
MAX. 1200 LUMENS	IP65

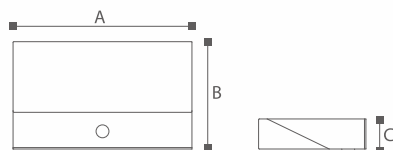

	Lamp	Lumen	A	B	C
NX17104	LED 13W	1200LM	256	161	58
NX17104S	LED 13.5W	1200LM	256	161	69



NX17105



Lighting Technology
Luminaires with LED
with LED integral power supply unit

Material
Die-casting Aluminium; PC; Diffuser

Body color
Black, Dark Gray, Silver Gray



Certification






 ISO9001-2015 ISO14000  BSCI




LED 13 W	TEMPERATURE 2700K - 6500K
MAX. 1200 LUMENS	IP65



	Lamp	Lumen	A	B	C
NX17105	LED 13W	1200LM	285	110	106
NX17105S	LED 13.5W	1200LM	285	110	106



NX17106/NX17107



Lighting Technology
Luminaires with LED
with LED integral power supply unit

Material
Die-casting Aluminium; PC; Diffuser

Body color
Black, Dark Gray, Sliver Gray

Certification






 ISO9001-2015 ISO14000  BSCI

LED
13 W
TEMPERATURE
2700K
6500K

MAX.
1200
LUMENS
IP65

	Lamp	Lumen	A	B	C
NX17106	LED 7W	600LM	180	114	65
NX17107	LED 13W	1200LM	250	123	74



NX17201



Lighting Technology
Luminaires with LED
with LED integral power supply unit

Material
Die-casting Aluminium; PC; Diffuser

Body color
Black, Dark Gray, Silver Gray

Certification







 ISO9001-2015 ISO14000  BSCI

LED
13W
TEMPERATURE
2700K
6500K

MAX.
1200
LUMENS
IP65

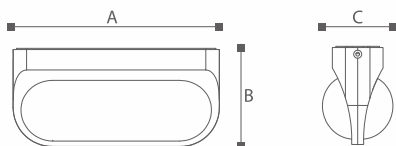

	Lamp	Lumen	A	B	C
NX17201	LED 13W	1200LM	265	107	76
NX17209	LED 7W	600LM	185	88	63



NX17202



Lighting Technology

Luminaires with LED with LED integral power supply unit

Material

Die-casting Aluminium; PC; Diffuser

Body color


Black, Dark Gray, Sliver Gray

Certification

CE CB ETL SAA VDE BIS
ISO9001-2015 ISO14000 BSCI

LED
13 W
TEMPERATURE
2700K
6500K



MAX.
1200
LUMENS
IP65

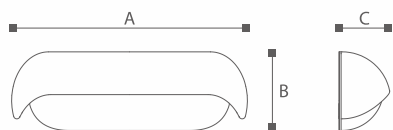

	Lamp	Lumen	A	B	C
NX17202	LED 13W	1200LM	270	100	58



NX17203

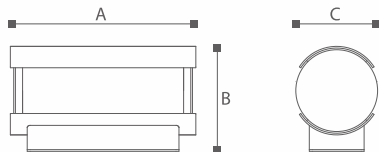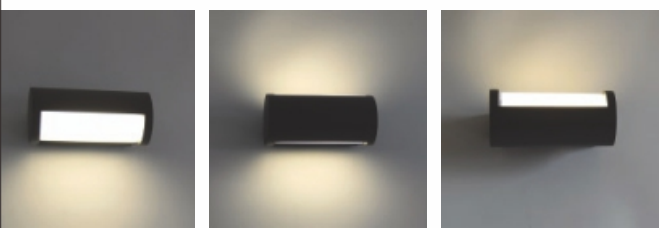

Lighting Technology
Luminaires with LED
with LED integral power supply unit

Material
Die-casting Aluminium; PC; Diffuser

Body color
Black, Dark Gray, Sliver Gray

Certification






 ISO9001-2015 ISO14000  BSCI

LED 13 W	TEMPERATURE 2700K 6500K
MAX. 1200 LUMENS	IP65

	Lamp	Lumen	A	B	C
NX17203	LED 13W	1200LM	223	130	105



NX17206



Lighting Technology
Luminaires with LED
with LED integral power supply unit

Material
Die-casting Aluminium; PC; Diffuser

Body color
Black, Dark Gray, Sliver Gray

Certification







 ISO9001-2015 ISO14000  BSCI

LED
10 W
TEMPERATURE
2700K
6500K

MAX.
850
LUMENS
IP65

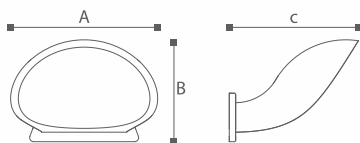

	Lamp	Lumen	A	B	C
NX17206	LED 10W	850LM	185	122	170




NX17208



NX17208



NX17208S



Lighting Technology

Luminaires with LED with LED integral power supply unit

Material

Die-casting Aluminium; PC; Diffuser

Body color

Black, Dark Gray, Sliver Gray


Certification

CE CB ENEC SAA VDE BIS
ISO9001-2015 ISO14000 BSCI

LED
11 W
TEMPERATURE
2700K
6500K

MAX.
850
LUMENS
IP65

	Lamp	Lumen	A	B	C
NX17208	LED 10W	850LM	118	222	66
NX17208S	LED 11W	850LM	118	222	66



NX17210



Lighting Technology
Luminaires with LED
with LED integral power supply unit

Material
Die-casting Aluminium; PC; Diffuser

Body color
Black, Dark Gray, Sliver Gray

Certification







 ISO9001-2015 ISO14000  BSCI

LED
11 W
TEMPERATURE
2700K
6500K

MAX.
1000
LUMENS
IP65



	Lamp	Lumen	A	B	C
NX17210	LED 11W	1000LM	106	200	62



NX17211



Lighting Technology
Luminaires with LED
with LED integral power supply unit

Material
Die-casting Aluminium; PC; Diffuser

Body color
Black, Dark Gray, Sliver Gray

Certification







 ISO9001-2015 ISO14000  BSCI

LED
20 W
TEMPERATURE
2700K
6500K

MAX.
2000
LUMENS
IP65



	Lamp	Lumen	A	B	C
NX17211	LED 20W	2000LM	251	251	55



NX17212



Lighting Technology
Luminaires with LED
with LED integral power supply unit

Material
Die-casting Aluminium; Tempered Glass

Body color
Black, Dark Gray, Silver Gray

Certification







 ISO9001-2015 ISO14000  BSCI

LED
7 W
TEMPERATURE
2700K
6500K

MAX.
500
LUMENS
IP65

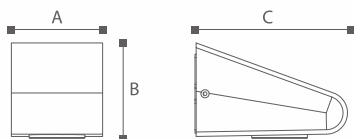

	Lamp	Lumen	A	B	C
NX17212	LED 7W	500LM	82	86	137

NX17301/NX17302



Lighting Technology
Luminaires with LED
with LED integral power supply unit

Material
Die-casting Aluminium; Tempered Glass

Body color
Black, Dark Gray, Silver Gray


Certification







 ISO9001-2015 ISO14000  BSCI

LED 13 ^W	TEMPERATURE 2700K - 6500K
MAX. 1200 LUMENS	IP65

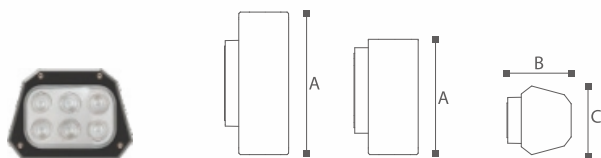

	Lamp	Lumen	A	B	C
NX17301	LED 7W	600LM	162	90	96
NX17302	LED 13W	1200LM	200	90	96

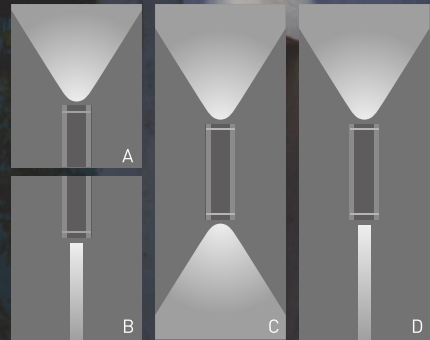

NX17303/NX17304



Lighting Technology
Luminaires with LED
with LED integral power supply unit

Material
Die-casting Aluminium; Tempered Glass

Body color
Black, Dark Gray, Silver Gray


Certification






 ISO9001-2015 ISO14000  BSCI

LED 11 W	TEMPERATURE 2700K 6500K
MAX. 1200 LUMENS	IP65

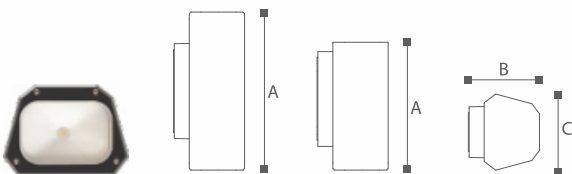

	Lamp	Lumen	A	B	C
NX17303	LED 7W	600LM	162	90	96
NX17304	LED 11W	1200LM	200	90	96



NX1740 Series



Lighting Technology
Luminaires with LED
with LED integral power supply unit

Material
Aluminium extruded sections; Die-casting
Aluminium; PC

Body color
Black, Dark Gray, Silver Gray


Certification






 ISO9001-2015 ISO14000  BSCI

LED 11 W	TEMPERATURE 2700K 6500K
MAX. 1000 LUMENS	IP65

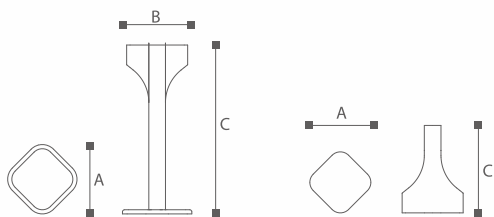

Lamp	Lumen	A	B	C
NX17401	LED 11W 1000LM	166	166	300
NX17402	LED 11W 1000LM	166	166	500
NX17403	LED 11W 1000LM	166	166	800
NX17404	LED 11W 1000LM	147	147	210



NX1750 Series



Lighting Technology

Luminaires with LED
with LED integral power supply unit

Material

Aluminium extruded sections; Die-casting
Aluminium; PC

Body color


Black, Dark Gray, Silver Gray

Certification

CE CB ETL SAA VDE BIS
ISO9001-2015 ISO14000 BSCI

LED
13W
TEMPERATURE
2700K
6500K

MAX.
1200
LUMENS
IP54

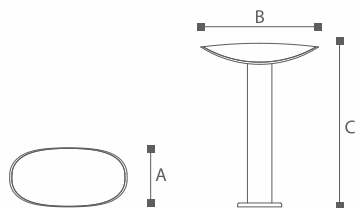

	Lamp	Lumen	A	B	C
NX17501	LED 13W	1200LM	121	245	300
NX17502	LED 13W	1200LM	121	245	500
NX17503	LED 13W	1200LM	121	245	800

NEXLEDS
Products Of Sweden



NX1760 Series



Lighting Technology
Luminaires with LED
with LED integral power supply unit

Material
Aluminium extruded sections; Die-casting
Aluminium; PC



Body color
Black, Dark Gray, Silver Gray

Certification






 ISO9001-2015 ISO14000  BSCI

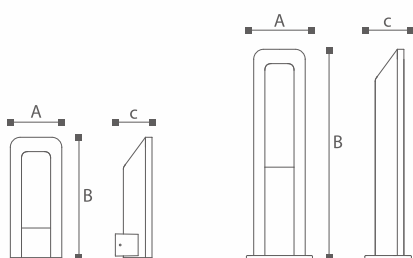

	Lamp	Lumen	A	B	C
NX17602	LED 13W	1200LM	167	500	111
NX17603	LED 13W	1200LM	167	800	111
NX17604	LED 9W	850LM	127	280	102



NX1770 Series



Lighting Technology
Luminaires with LED
with LED integral power supply unit

Material
Aluminium extruded sections; Die-casting
Aluminium; PC

Body color
Black, Dark Gray, Silver Gray



Certification








 ISO9001-2015 ISO14000  BSCI

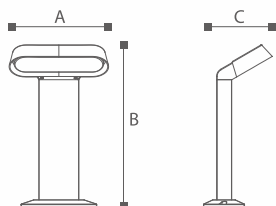

	Lamp	Lumen	A	B	C
NX17701	LED 13W	1200LM	230	300	159
NX17702	LED 13W	1200LM	230	500	159
NX17703	LED 13W	1200LM	230	800	159



NX16101/NX16102

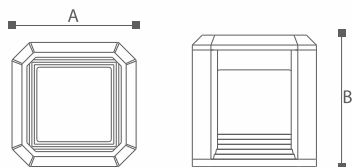

Lighting Technology
Luminaires with LED
with LED integral power supply unit

Material
Die-casting Aluminium; PC; Diffuser

Body color
Black, Dark Gray, Sliver Gray

Certification






 ISO9001-2015 ISO14000  BSCI

LED 20 W	TEMPERATURE 2700K - 6500K
MAX. 2000 LUMENS	IP65

	Lamp	Lumen	A	B
NX16101	LED 20W	2000LM	250	265
	E27 23W			
NX16102	LED 13W	1200LM	150	160
	E27 23W			



NX16103



Lighting Technology
Luminaires with LED
with LED integral power supply unit

Material
Die-casting Aluminium; PC; Diffuser

Body color
Black, Dark Gray, Sliver Gray

Certification








 ISO9001-2015 ISO14000  BSCI

LED
10 W
TEMPERATURE
2700K
6500K

MAX.
1200
LUMENS
IP65

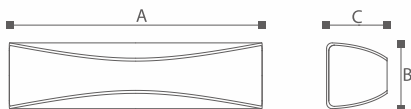

	Lamp	Lumen	A	B	C
NX16103	LED 10W	1200LM	230	60	55

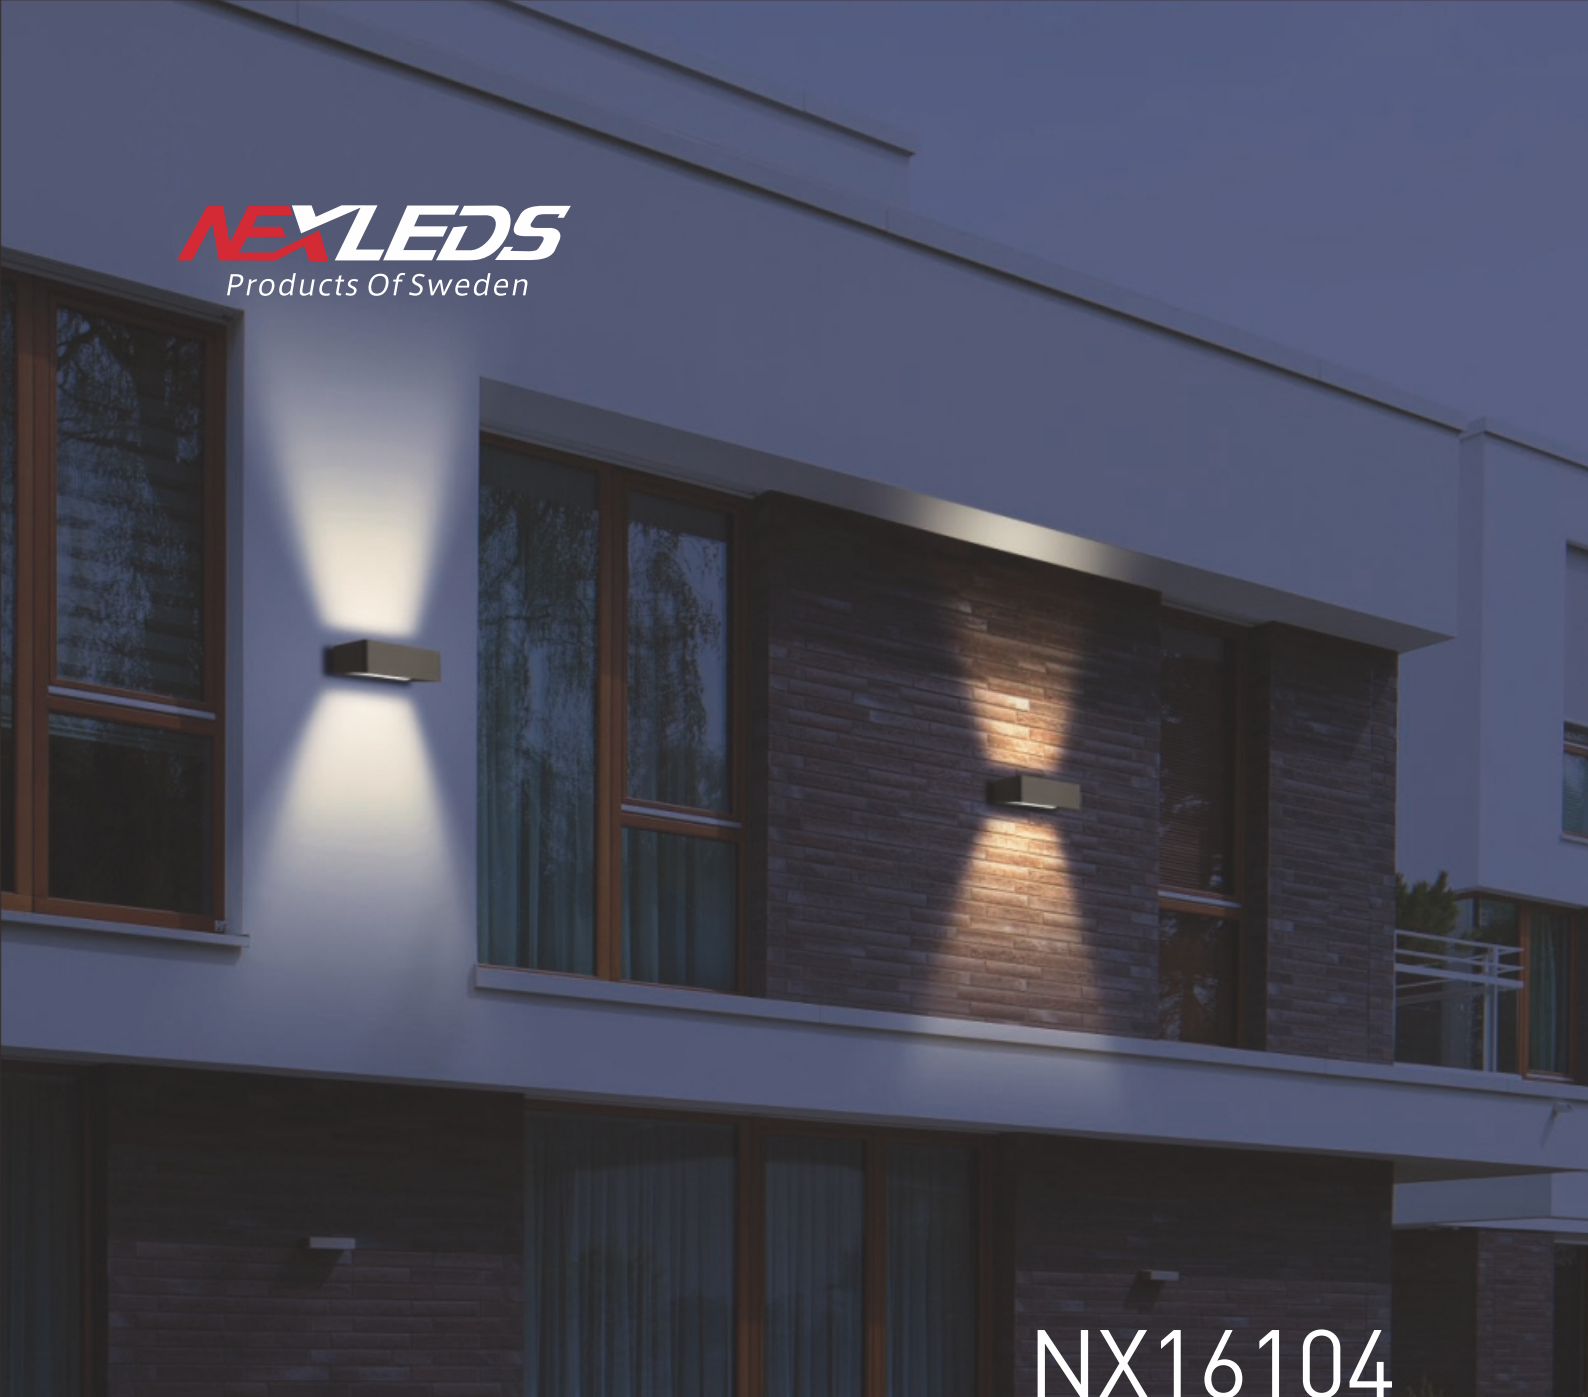

NX16104



Lighting Technology
Luminaires with LED
with LED integral power supply unit

Material
Die-casting Aluminium; PC; Diffuser

Body color
Black, Dark Gray, Sliver Gray

Certification







 ISO9001-2015 ISO14000  BSCI

LED
13 W
TEMPERATURE
2700K
6500K

MAX.
1200
LUMENS
IP65

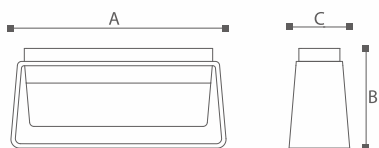

Lamp	Lumen	A	B	C
NX16104	LED 13W 1200LM	248	115	70



NX16105



Lighting Technology
Luminaires with LED
with LED integral power supply unit

Material
Die-casting Aluminium; PC; Diffuser

Body color
Black, Dark Gray, Sliver Gray

Certification







 ISO9001-2015 ISO14000  BSCI

LED
13 W
TEMPERATURE
2700K
6500K


MAX.
1200
LUMENS
IP65

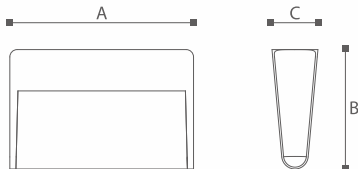

	Lamp	Lumen	A	B	C
NX16105	LED 13W	1200LM	200	130	50



NX16106



Lighting Technology
Luminaires with LED
with LED integral power supply unit

Material
Die-casting Aluminium; PC; Diffuser

Body color
Black, Dark Gray, Sliver Gray

Certification






 ISO9001-2015 ISO14000  BSCI

LED
13 W
TEMPERATURE
2700K
-
6500K

MAX.
1100
LUMENS
IP65

	Lamp	Lumen	A	B	C
NX16106	LED 13W	1100LM	169	219	55



NX16107



Lighting Technology
Luminaires with LED
with LED integral power supply unit

Material
Die-casting Aluminium; PC; Diffuser

Body color
Black, Dark Gray, Sliver Gray

Certification







 ISO9001-2015 ISO14000  BSCI

LED
10 W
TEMPERATURE
2700K
6500K

MAX.
1200
LUMENS
IP65



	Lamp	Lumen	A	B	C
NX16107	LED 10W	1200LM	175	202	40



NX16108



Lighting Technology
Luminaires with LED
with LED integral power supply unit

Material
Die-casting Aluminium; PC; Diffuser

Body color
Black, Dark Gray, Sliver Gray

Certification







 ISO9001-2015 ISO14000  BSCI

LED
7 W
TEMPERATURE
2700K
6500K


MAX.
600
LUMENS
IP65

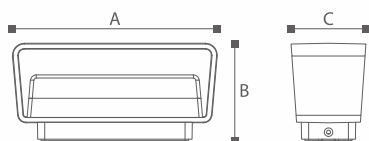

	Lamp	Lumen	A	B	C
NX16108	LED 7W	600LM	175	83	64



NX16201



Lighting Technology
Luminaires with LED
with LED integral power supply unit

Material
Die-casting Aluminium; PC; Diffuser

Body color
Black, Dark Gray, Silver Gray

Certification






 ISO9001-2015 ISO14000  BSCI

LED
20 W
TEMPERATURE
2700K
6500K

MAX.
1200
LUMENS
IP65

Lamp	Lumen	A	B	C
NX16201	LED 20W 2000LM	250	250	50



NX1640 Series



Lighting Technology
Luminaires with LED
with LED integral power supply unit


Material
Die-casting Aluminium; PC; Diffuser

Body color
Black, Dark Gray, Sliver Gray

Certification

LED
13 W
TEMPERATURE
2700K
6500K


MAX.
1200
LUMENS
IP65

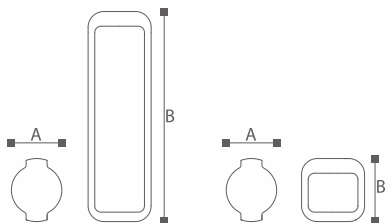

	Lamp	Lumen	A	B
NX16401	LED 13W	1200LM	120	300
NX16402	LED 13W	1200LM	120	500
NX16403	LED 13W	1200LM	120	800
NX16404	LED 13W	1200LM	138	250



NX1650 Series

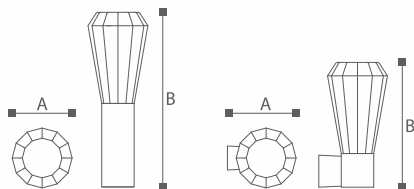

Lighting Technology
Luminaires with LED
with LED integral power supply unit

Material
Aluminium Alloy; Diffuser PC

Body color
Black, Dark Gray, Sliver Gray

Certification







 ISO9001-2015 ISO14000  BSCI

LED
13W
TEMPERATURE
2700K
6500K

E27
23W
IP54

	Lamp	A	B
NX16501	LED 13W	120	300
	E27 23W		
NX16502	LED 13W	120	500
	E27 23W		
NX16503	LED 13W	120	800
	E27 23W		
NX16504	LED 13W	120	250
	E27 23W		



NX1660 Series



Lighting Technology
Luminaires with LED
with LED integral power supply unit

Material
Aluminium extruded sections; Die-casting
Aluminium; PC

Body color
Black, Dark Gray, Silver Gray


Certification






 ISO9001-2015 ISO14000  BSCI

LED 13W	TEMPERATURE 2700K - 6500K
MAX. 1200 LUMENS	IP65

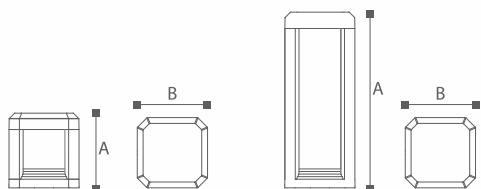

	Lamp	Lumen	A	B
NX16601	LED 13W	1200LM	300	150
NX16602	LED 13W	1200LM	500	150
NX16603	LED 13W	1200LM	800	150
NX16604	LED 13W	1200LM	160	150



NX15101



Lighting Technology

Luminaires with LED with LED integral power supply unit

Material

Die-casting Aluminium; PC; Diffuser

Body color

Black, Dark Gray, Sliver Gray

Certification









 ISO9001-2015 ISO14000  BSCI

LED
10 W
TEMPERATURE
2700K
6500K

MAX.
1100
LUMENS
IP65

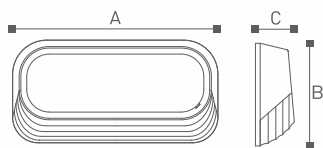

	Lamp	Lumen	A	B	C
NX15101	LED 10W	1100LM	240	120	45



NX15102



Lighting Technology
Luminaires with LED
with LED integral power supply unit

Material
Die-casting Aluminium; PC; Diffuser

Body color
Black, Dark Gray, Silver Gray

Certification







 ISO9001-2015 ISO14000  BSCI

LED
13 W
TEMPERATURE
2700K
6500K

MAX.
1200
LUMENS
IP65

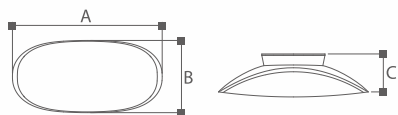

	Lamp	Lumen	A	B	C
NX15102	LED 13W	1200LM	236	114	68



NX15103



Lighting Technology
Luminaires with LED
with LED integral power supply unit

Material
Die-casting Aluminium; PC; Diffuser

Body color
Black, Dark Gray, Sliver Gray

Certification








 ISO9001-2015 ISO14000  BSCI

LED
13 W
TEMPERATURE
2700K
6500K

MAX.
1200
LUMENS
IP65



	Lamp	Lumen	A	B	C
NX15103	LED 13W	1200LM	200	200	180



NX15104



Lighting Technology
Luminaires with LED
with LED integral power supply unit

Material
Die-casting Aluminium; PC

Body color
Black, Dark Gray, Sliver Gray

Certification







 ISO9001-2015 ISO14000  BSCI

LED
3.5W
TEMPERATURE
2700K
6500K

MAX.
160
LUMENS
IP65

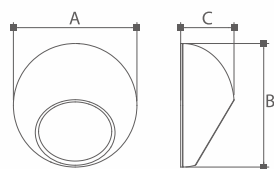

Lamp	Lumen	A	B	C
NX15104	LED 3.5W 160LM	120	120	52



NX15105



Lighting Technology

Luminaires with LED with LED integral power supply unit

Material

Die-casting Aluminium; PC; Diffuser

Body color


Black, Dark Gray, Silver Gray

Certification

CE CB ETL SAA VDE BIS
ISO9001-2015 ISO14000 BSCI

LED
10 W
TEMPERATURE
2700K
6500K

MAX.
1200
LUMENS
IP54

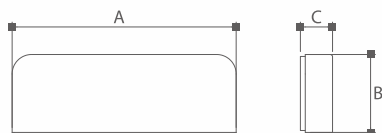

	Lamp	Lumen	A	B	C
NX15105	LED 10W	900LM	230	80	33



NX15106



Lighting Technology

Luminaires with LED with LED integral power supply unit

Material

Die-casting Aluminium; PC; Diffuser

Body color

Black, Dark Gray, Sliver Gray

Certification









 ISO9001-2015 ISO14000  BSCI

LED 9 W	TEMPERATURE 2700K - 6500K
MAX. 810 LUMENS	IP65

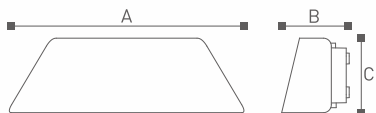

Lamp	Lumen	A	B	C	
NX15106	LED 9W	810LM	236	68	75



NX15107



Lighting Technology
Luminaires with LED
with LED integral power supply unit

Material
Die-casting Aluminium; PC; Diffuser

Body color
Black, Dark Gray, Sliver Gray

Certification







 ISO9001-2015 ISO14000  BSCI

LED
13 W
TEMPERATURE
2700K
6500K

MAX.
1200
LUMENS
IP65

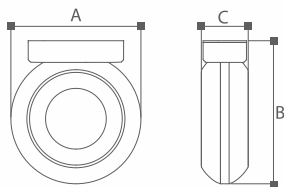

	Lamp	Lumen	A	B	C
NX15107	LED 13W	1200LM	200	220	70

NEXLEDS
Products Of Sweden




NX15108-NX15110



NX15108



NX15109



NX15110

Lighting Technology
Luminaires with LED
with LED integral power supply unit

Material
Die-casting Aluminium; PC; Diffuser

Body color
Black, Dark Gray, Sliver Gray


Certification






 ISO9001-2015 ISO14000  BSCI


LED 13 W	TEMPERATURE 2700K - 6500K
MAX. 1200 LUMENS	IP65



	Lamp	Lumen	A	B	C
NX15108	LED 13W	1200LM	160	210	58
NX15109	LED 11W	1040LM	160	210	58
NX15110	LED 11W	1040LM	160	210	58



NX1520 Series

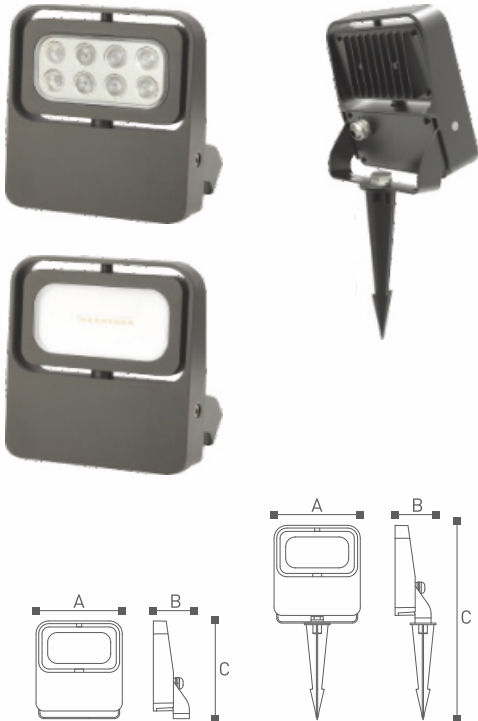

Lighting Technology
Luminaires with LED
with LED integral power supply unit

Material
Die-casting Aluminium; PC

Body color
Black, Dark Gray, Sliver Gray


Certification






 ISO9001-2015 ISO14000  BSCI

LED 9W	TEMPERATURE 2700K 6500K
MAX. 800 LUMENS	IP65

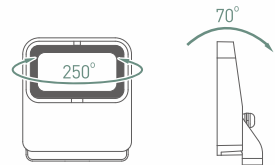

Lamp	Lumen	A	B	C	Beam angle
NX15201	LED 9W 800LM	134	56	152	10°/25°
NX15202	LED 9W 800LM	134	56	152	120°
NX15203	LED 9W 800LM	134	64	303	10°/25°
NX15204	LED 9W 800LM	134	64	303	120°

NX1530 Series



Lighting Technology
Luminaires with LED
with LED integral power supply unit

Material
Die-casting Aluminium; PC

Body color
Black, Dark Gray, Sliver Gray

Certification









 ISO9001-2015 ISO14000  BSCI

LED 13 W	TEMPERATURE 2700K 6500K
MAX. 1300 LUMENS	IP65

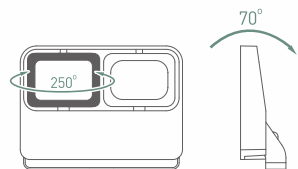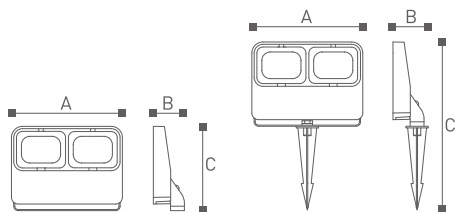

	Lamp	Lumen	A	B	C	Beam angle
NX15301	LED 13W	1300LM	200	56	152	10°/25°
NX15302	LED 13W	1300LM	200	56	152	120°
NX15303	LED 13W	1300LM	200	64	303	10°/25°
NX15304	LED 13W	1300LM	200	64	303	120°



NX1540 Series



Lighting Technology
Luminaires with LED
with LED integral power supply unit

Material
Aluminium extruded sections; Die-casting
Aluminium; PC

Body color
Black, Dark Gray, Silver Gray

Certification







 ISO9001-2015 ISO14000  BSCI

LED
12.5W
TEMPERATURE
2700K
6500K

MAX.
1400
LUMENS
IP54

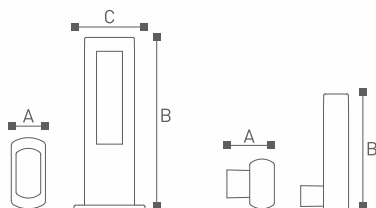

	Lamp	Lumen	A	B	C
NX15401	LED 10W	1000LM	75	300	156
NX15402	LED 12.5W	1400LM	75	500	156
NX15403	LED 12.5W	1400LM	75	800	156
NX15404	LED 10W	1000LM	105	250	156
NX15405	LED 10W	1000LM	105	280	156



NX1550 Series



Lighting Technology
Luminaires with LED
with LED integral power supply unit

Material
Aluminium extruded sections; Die-casting
Aluminium; PC

Body color
Black, Dark Gray, Sliver Gray


Certification






 ISO9001-2015 ISO14000  BSCI

LED 9 W	TEMPERATURE 2700K - 6500K
MAX. 810 LUMENS	IP54

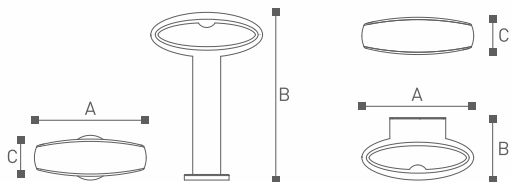

	Lamp	Lumen	A	B	C
NX15501	LED 9W	810LM	200	300	80
NX15502	LED 9W	810LM	200	500	80
NX15503	LED 9W	810LM	200	800	80
NX15504	LED 9W	810LM	200	112	80



NX1560 Series



Lighting Technology
Luminaires with LED
with LED integral power supply unit

Material
Aluminium extruded sections; Die-casting
Aluminium; PC

Body color
Black, Dark Gray, Silver Gray


Certification






 ISO9001-2015 ISO14000  BSCI

LED 9W	TEMPERATURE 2700K 6500K
MAX. 810 LUMENS	IP54

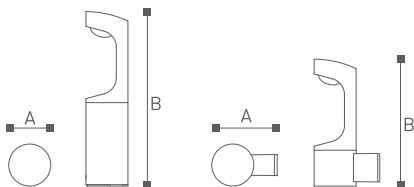

	Lamp	Lumen	A	B
NX15601	LED 9W	810LM	90	300
NX15602	LED 9W	810LM	90	500
NX15603	LED 9W	810LM	90	800
NX15604	LED 9W	810LM	140	272



NX1570 Series



Lighting Technology
Luminaires with LED
with LED integral power supply unit

Material
Aluminium extruded sections; Die-casting
Aluminium; PC

Body color
Black, Dark Gray, Sliver Gray

Certification







 ISO9001-2015 ISO14000  BSCI

LED
9 W
TEMPERATURE
2700K
6500K

MAX.
810
LUMENS
IP54

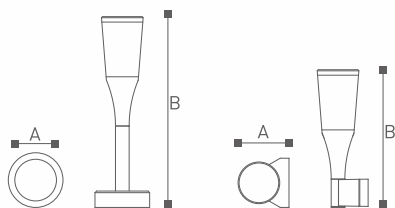

	Lamp	Lumen	A	B
NX15701	LED 9W	810LM	100	300
NX15702	LED 9W	810LM	100	500
NX15703	LED 9W	810LM	100	800
NX15704	LED 9W	810LM	100	250



NX14101



Lighting Technology
Luminaires with LED
with LED integral power supply unit

Material
PC; Diffuser

Body color
Black, Dark Gray, Sliver Gray

Certification







 ISO9001-2015 ISO14000  BSCI

LED
7W
TEMPERATURE
2700K
6500K

MAX.
490
LUMENS
IP54



	Lamp	Lumen	A	B	C
NX14101	LED 7W	490LM	210	60	32



NX14105-NX14108



Lighting Technology
Luminaires with LED
with LED integral power supply unit

Material
Die-casting Aluminium; PC; Diffuser

Body color
Black, Dark Gray, Sliver Gray

Certification







 ISO9001-2015 ISO14000  BSCI

LED
13 W
TEMPERATURE
2700K
6500K

MAX.
1020
LUMENS
IP54

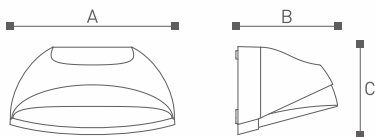

	Lamp	Lumen	A	B	C
NX14105	LED 7W	550LM	160	100	86
NX14106	LED 13W	1020LM	242	149	129
NX14108	GX53 11W		242	149	129



NX14109-NX14111



Lighting Technology
Luminaires with LED
with LED integral power supply unit

Material
Die-casting Aluminium; PC; Diffuser

Body color
Black, Dark Gray, Sliver Gray

Certification








 ISO9001-2015 ISO14000  BSCI

LED
13 W
TEMPERATURE
2700K
6500K


MAX.
1020
LUMENS
IP54

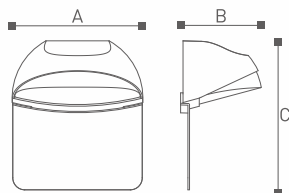

	Lamp	Lumen	A	B	C
NX14109	LED 7W	550LM	160	100	184
NX14110	LED 13W	1020LM	242	149	239
NX14111	GX53 11W		242	149	239

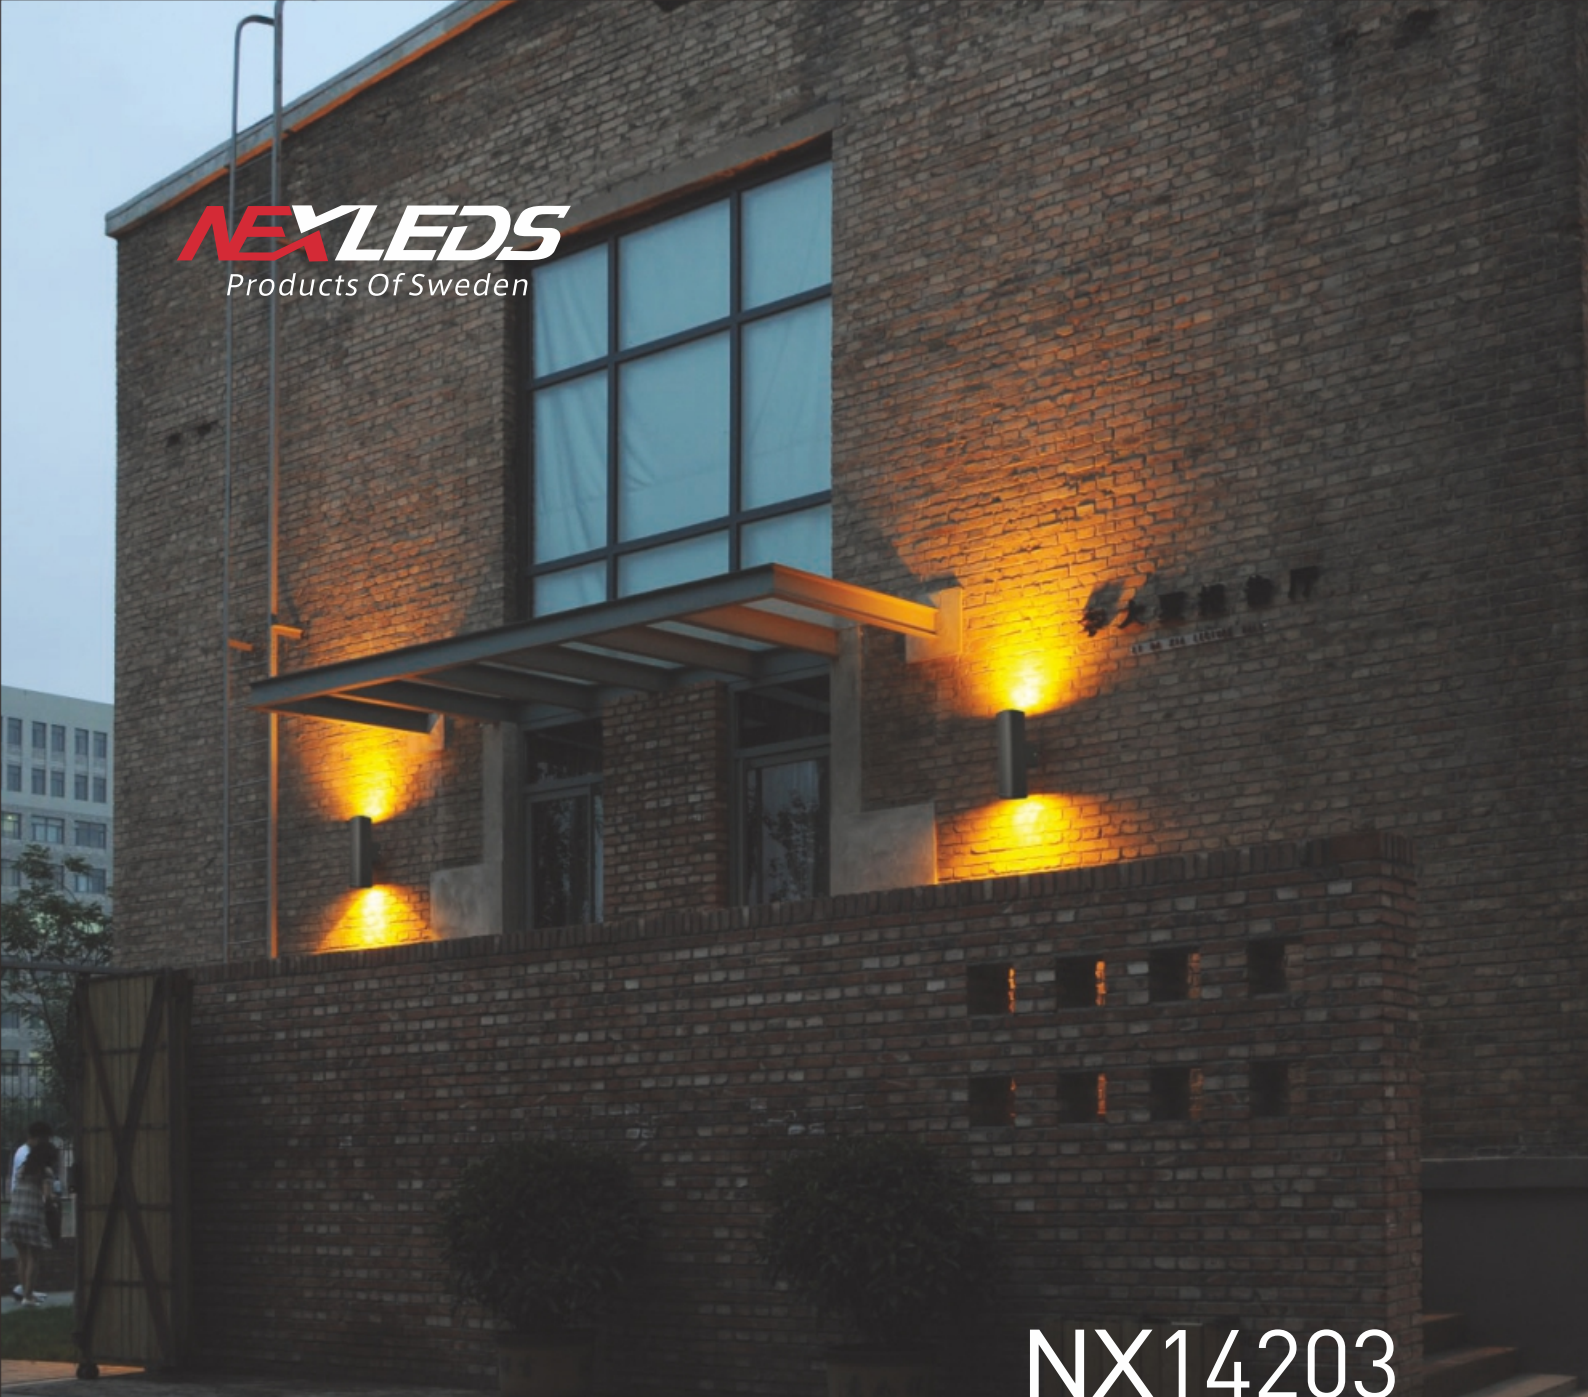

NX14203

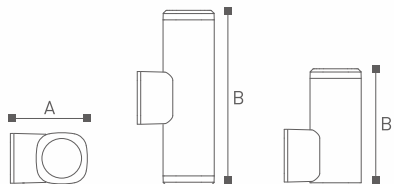

Lighting Technology
Luminaires with LED
with LED integral power supply unit

Material
Aluminium extruded section;
Die-casting Aluminium; PC;
Tempered glass;

Body color
Black, Dark Gray, Sliver Gray

Certification








 ISO9001-2015 ISO14000  BSCI

LED 7 W	TEMPERATURE 2700K - 6500K
MAX. 640 LUMENS	IP54

	Lamp	Lumen	A	B
NX14203	LED 3.5W	320LM	106	157
NX14204	LED 7W	640LM	106	238

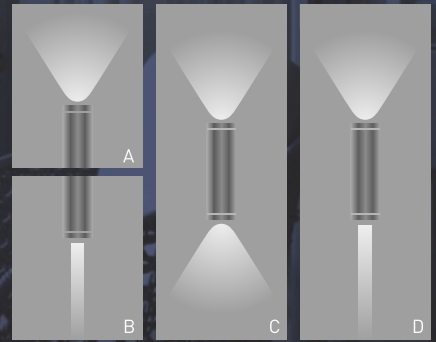

NX14205

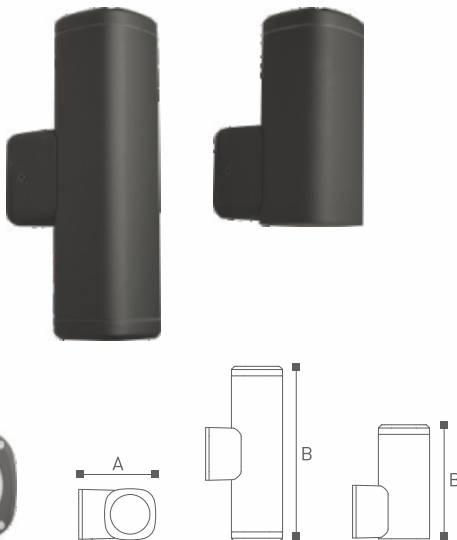

Lighting Technology
Luminaires with LED
with LED integral power supply unit

Material
Aluminium extruded section;
Die-casting Aluminium; PC;
Tempered glass;

Body color
Black, Dark Gray, Silver Gray

Certification






 ISO9001-2015 ISO14000  BSCI

LED 7W	TEMPERATURE 2700K 6500K
GU10 70W	IP54
MAX. 1200 LUMENS	

	Lamp	Lumen	A	B
NX14205	LED 3.5W	320LM	106	157
NX14206	LED 7W	640LM	106	238
NX14207	GU10 35W		106	157
NX14208	GU10 2x35W		106	238



NX1430 Series



Lighting Technology

Luminaires with E27/B22 lamp holder fix with energy saving lighting Max. 18W



Material


Aluminium Alloy; Diffuser PC

Body color

Black, Dark Gray, Sliver Gray

Certification

CE CB ETL SAA V-ROHS BIS
ISO9001-2015 ISO14000 BSCI

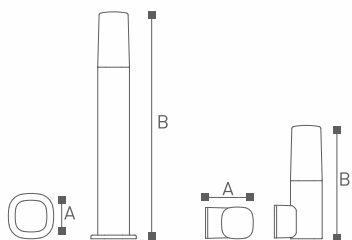

	Lamp	A	B
NX14301	E27 18W	70	300
NX14302	E27 18W	70	500
NX14303	E27 18W	70	800
NX14304	E27 18W	106	250



NX1430 Series



Lighting Technology
Luminaires with LED
with LED integral power supply unit

Material
Aluminium extruded sections; Die-casting
Aluminium; PC

Body color
Black, Dark Gray, Silver Gray

Certification







 ISO9001-2015 ISO14000  BSCI

LED
7W
TEMPERATURE
2700K
6500K

MAX.
520
LUMENS
IP54

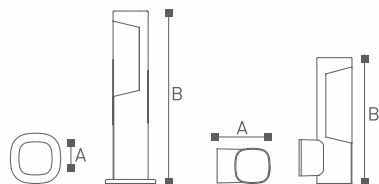

	Lamp	Lumen	A	B
NX14305	LED 7W	520LM	70	300
NX14306	LED 7W	520LM	70	500
NX14307	LED 7W	520LM	70	800
NX14308	LED 7W	520LM	106	250



NX1430 Series



Lighting Technology
Luminaires with LED and PIR
with LED integral power supply unit

Material
Aluminium extruded sections; Die-casting
Aluminium; PC

Body color
Black, Dark Gray, Sliver Gray


Certification






 ISO9001-2015 ISO14000  BSCI

LED 7W	TEMPERATURE 2700K 6500K
MAX. 520 LUMENS	IP54

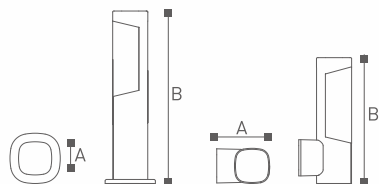

	Lamp	Lumen	A	B
NX14309	LED 7W	520LM	70	300
NX14310	LED 7W	520LM	70	500
NX14311	LED 7W	520LM	70	800
NX14312	LED 7W	520LM	106	250

NX1440 Series



Lighting Technology
Luminaires with LED
with LED integral power supply unit


Material
Aluminium extruded sections; Die-casting
Aluminium; PC

Body color
Black, Dark Gray, Sliver Gray

Certification


 ISO9001-2015 ISO14000  BSCI

LED 7W	TEMPERATURE 2700K 6500K
MAX. 520 LUMENS	IP54

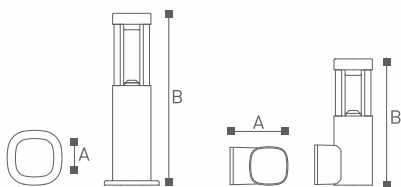

	Lamp	Lumen	A	B
NX14401	LED 7W	520LM	70	300
NX14402	LED 7W	520LM	70	500
NX14403	LED 7W	520LM	70	800
NX14404	LED 7W	520LM	106	220



NX1440 Series



Lighting Technology
Luminaires with LED
with LED integral power supply unit

Material
Aluminium extruded sections;
Die-casting Aluminium; PC; Diffuser

Body color
Black, Dark Gray, Sliver Gray

Certification








 ISO9001-2008 ISO14000  BSCI

LED 7W	TEMPERATURE 2700K 6500K
MAX. 520 LUMENS	IP54

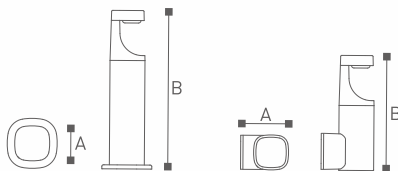

	Lamp	Lumen	A	B
NX14405	LED 7W	520LM	70	300
NX14406	LED 7W	520LM	70	500
NX14407	LED 7W	520LM	70	800
NX14408	LED 7W	520LM	106	220



NX1450 Series



Lighting Technology
Luminaires with LED
with LED integral power supply unit

Material
Aluminium extruded sections;
Die-casting Aluminium; PC; Diffuser

Body color
Black, Dark Gray, Silver Gray

Certification







 ISO9001-2008 ISO14000  BSCI

LED
7W
TEMPERATURE
2700K
6500K

MAX.
520
LUMENS
IP54

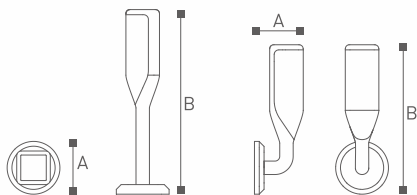

	Lamp	Lumen	A	B
NX14501	LED 7W	520LM	110	300
NX14502	LED 7W	520LM	110	500
NX14503	LED 7W	520LM	110	800
NX14504	LED 7W	520LM	100	310



NX1460 Series



Lighting Technology
Luminaires with LED
with LED integral power supply unit

Material
Aluminium extruded sections;
Die-casting Aluminium; PC; Diffuser

Body color
Black, Dark Gray, Sliver Gray


Certification






 ISO9001-2008 ISO14000  BSCI

LED 7W	TEMPERATURE 2700K 6500K
MAX. 520 LUMENS	IP54

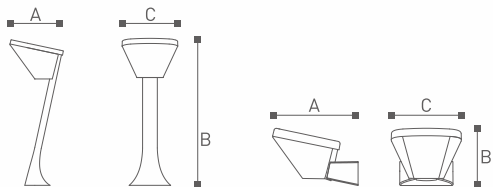

Lamp	Lumen	A	B	C
NX14601	LED 7W 520LM	126	300	132
NX14602	LED 7W 520LM	126	500	132
NX14603	LED 7W 520LM	126	800	132
NX14604	LED 7W 520LM	160	110	132



NX13101



Lighting Technology
Luminaires with LED
with LED integral power supply unit

Material
Aluminium extruded sections;
Die-casting Aluminium; Tempered Glass

Body color
Black, Dark Gray, Sliver Gray

Certification








 ISO9001-2008 ISO14000  BSCI


LED 7 W	TEMPERATURE 2700K 6500K
MAX. 540 LUMENS	IP54



	Lamp	Lumen	A	B	C
NX13101	LED 3.5W	260LM	150	60	58
NX13102	LED 7W	540LM	230	80	63



NX13105/NX13106

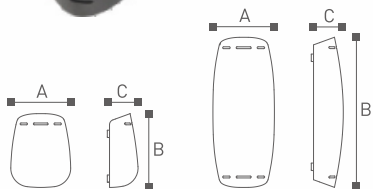

Lighting Technology
Luminaires with LED
with LED integral power supply unit

Material
Die-casting Aluminium; Tempered Glass

Body color
Black, Dark Gray, Sliver Gray

Certification






 ISO9001-2008 ISO14000  BSCI


LED
7W

TEMPERATURE
2700K
6500K


MAX.
540
LUMENS

IP54

	Lamp	Lumen	A	B	C
NX13105	LED 3.5W	260LM	82	100	43
NX13106	LED 7W	540LM	82	230	43

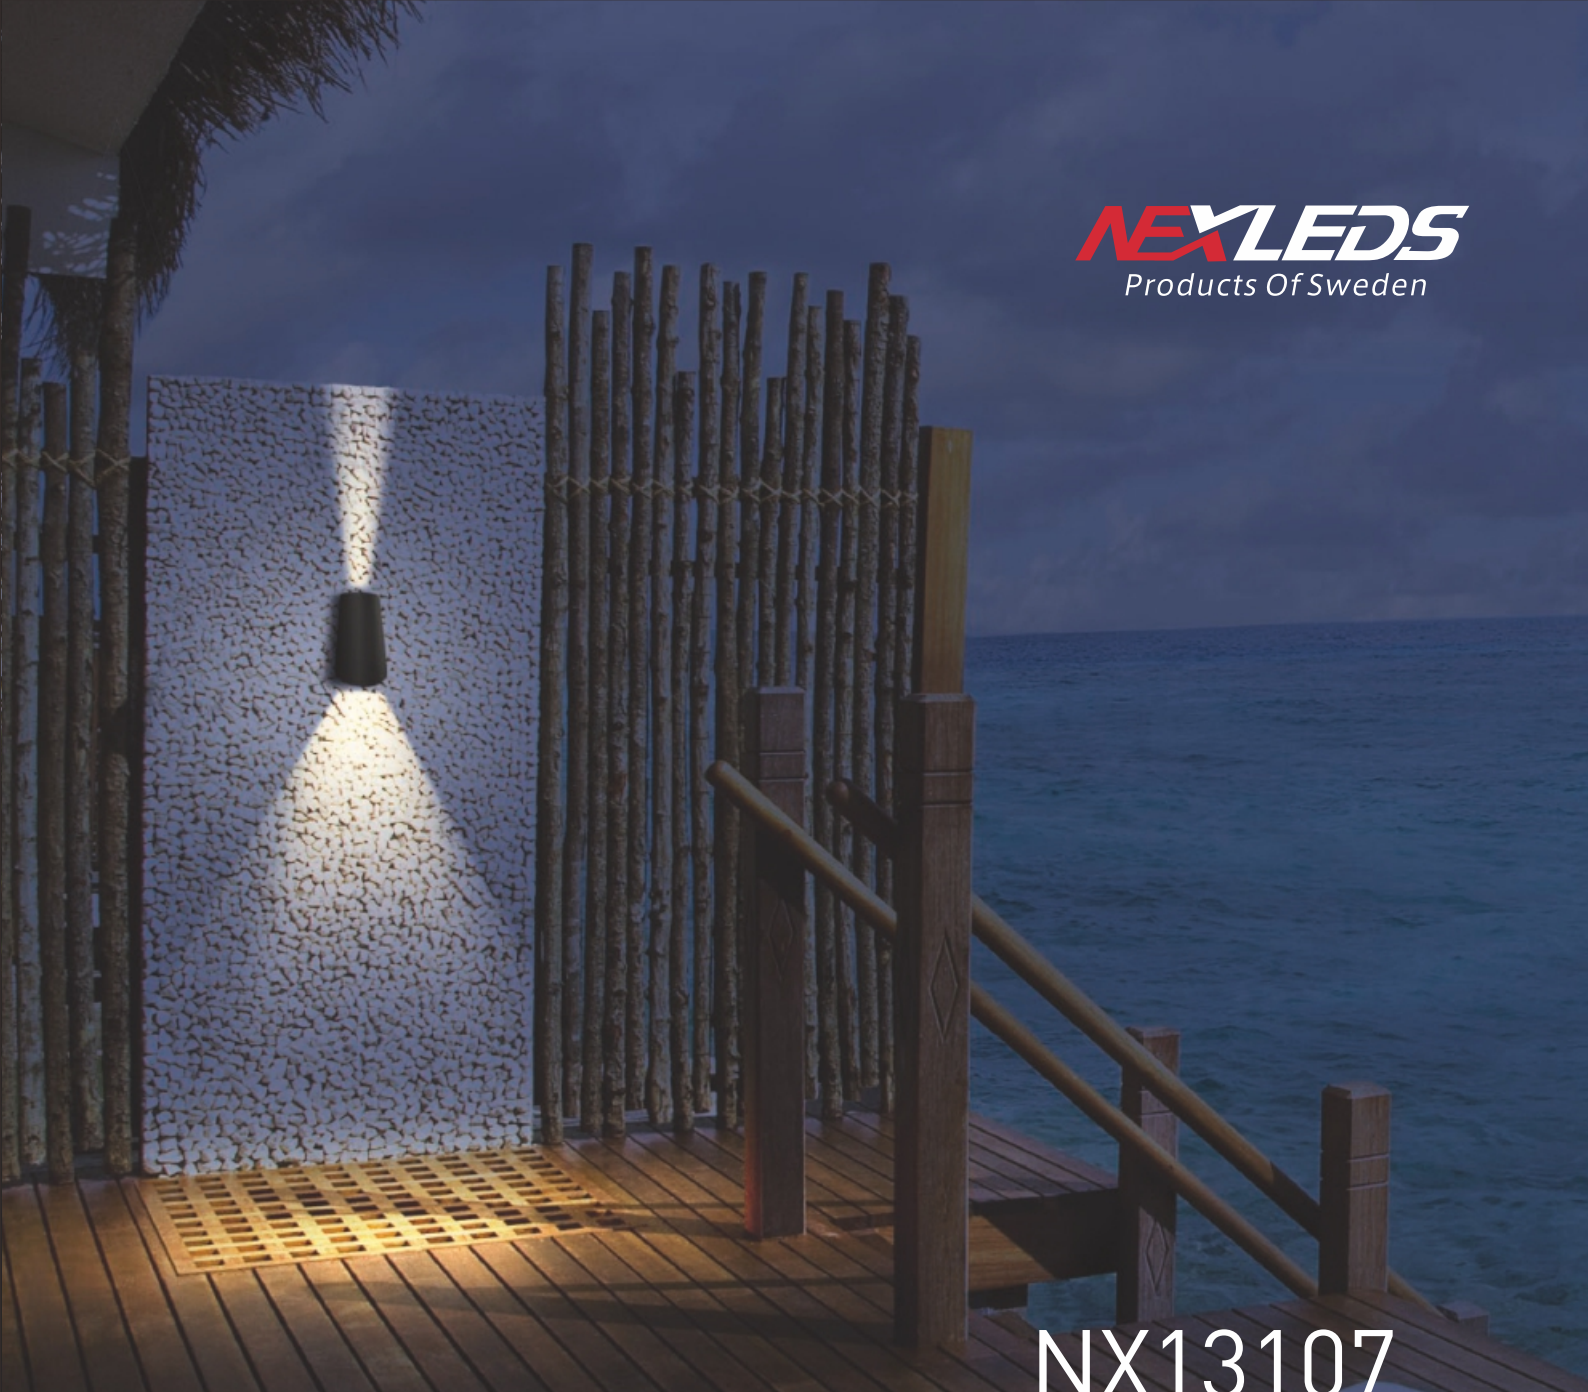

NX13107

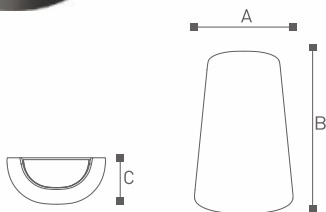

Lighting Technology
Luminaires with LED
with LED integral power supply unit

Material
Die-casting Aluminium; Tempered Glass

Body color
Black, Dark Gray, Silver Gray

Certification







 ISO9001-2008 ISO14000  BSCI

LED
11W
TEMPERATURE
2700K
6500K

MAX.
730
LUMENS
IP65

	Lamp	Lumen	A	B	C
NX13107	LED 11W	730LM	106	175	50

NX13201



Lighting Technology
Luminaires with LED
with LED integral power supply unit

Material
Aluminium extruded sections;
Die-casting Aluminium; Tempered Glass
Body color
Black, Dark Gray, Sliver Gray

Certification


CE CB ENEC SAA VDE BIS
ISO9001-2008 ISO14000 BSCI

LED 7 W	TEMPERATURE 2700K - 6500K
MAX. 570 LUMENS	IP54

	Lamp	Lumen	A	B
NX13201-A	LED 7W	570LM	138	44
NX13202-B	LED 7W	570LM	138	44
NX13203-C	LED 7W	380LM	138	44



NX13301

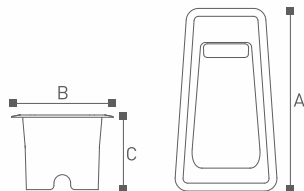

Lighting Technology
Luminaires with LED
with LED integral power supply unit

Material
Aluminium extruded sections;
Die-casting Aluminium; PC; Diffuser

Body color
Black, Dark Gray, Sliver Gray

Certification







 ISO9001-2008 ISO14000  BSCI

LED 7 W	TEMPERATURE 2700K - 6500K
MAX. 540 LUMENS	IP54

	Lamp	Lumen	A	B	C
NX13301	LED 7W	540LM	220	123	90
NX13302	LED 3.5W	270LM	148	89	58



NX13305



Lighting Technology
Luminaires with LED
with LED integral power supply unit

Material
Die-casting Aluminium; PC; Diffuser

Body color
Black, Dark Gray, Sliver Gray


Certification






 ISO9001-2008 ISO14000  BSCI

LED 13 W	TEMPERATURE 2700K - 6500K
MAX. 1200 LUMENS	IP65

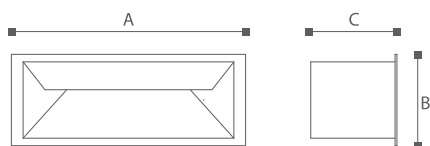

	Lamp	Lumen	A	B	C
NX13305	LED 13W	1200LM	250	98	90



NX13306



Lighting Technology
Luminaires with LED
with LED integral power supply unit

Material
Die-casting Aluminium; PC; Diffuser

Body color
Black, Dark Gray, Sliver Gray

Certification







 ISO9001-2008 ISO14000  BSCI

LED
13 W
TEMPERATURE
2700K
6500K

MAX.
1200
LUMENS
IP65

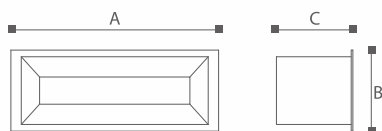

	Lamp	Lumen	A	B	C
NX13306	LED 13W	1200LM	250	98	90



NX13307



Lighting Technology

Luminaires with LED with LED integral power supply unit

Material

Die-casting Aluminium; PC; Diffuser


Body color

Black, Dark Gray, Sliver Gray

Certification

CE CB ETL SAA VDE BIS
ISO9001-2008 ISO14000 BSCI


LED 13 W	TEMPERATURE 2700K - 6500K
MAX. 1200 LUMENS	IP65

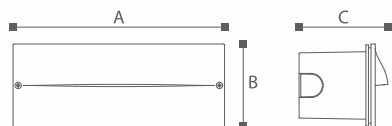

Lamp	Lumen	A	B	C	
NX13307	LED 13W	1200LM	250	98	105



NX1340 Series

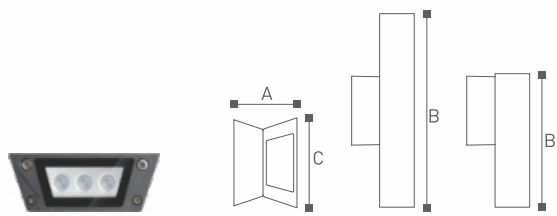

Lighting Technology
Luminaires with LED
with LED integral power supply unit

Material
Aluminium extruded sections;
Die-casting Aluminium;
Tempered glass

Body color
Black, Dark Gray, Sliver Gray

Certification


LED
7W

TEMPERATURE
2700K
6500K


MAX.
640
LUMENS

IP54

	Lamp	Lumen	A	B	C
NX13403	LED 3.5W	320LM	65	170	92
NX13404	LED 7W	640LM	65	200	92

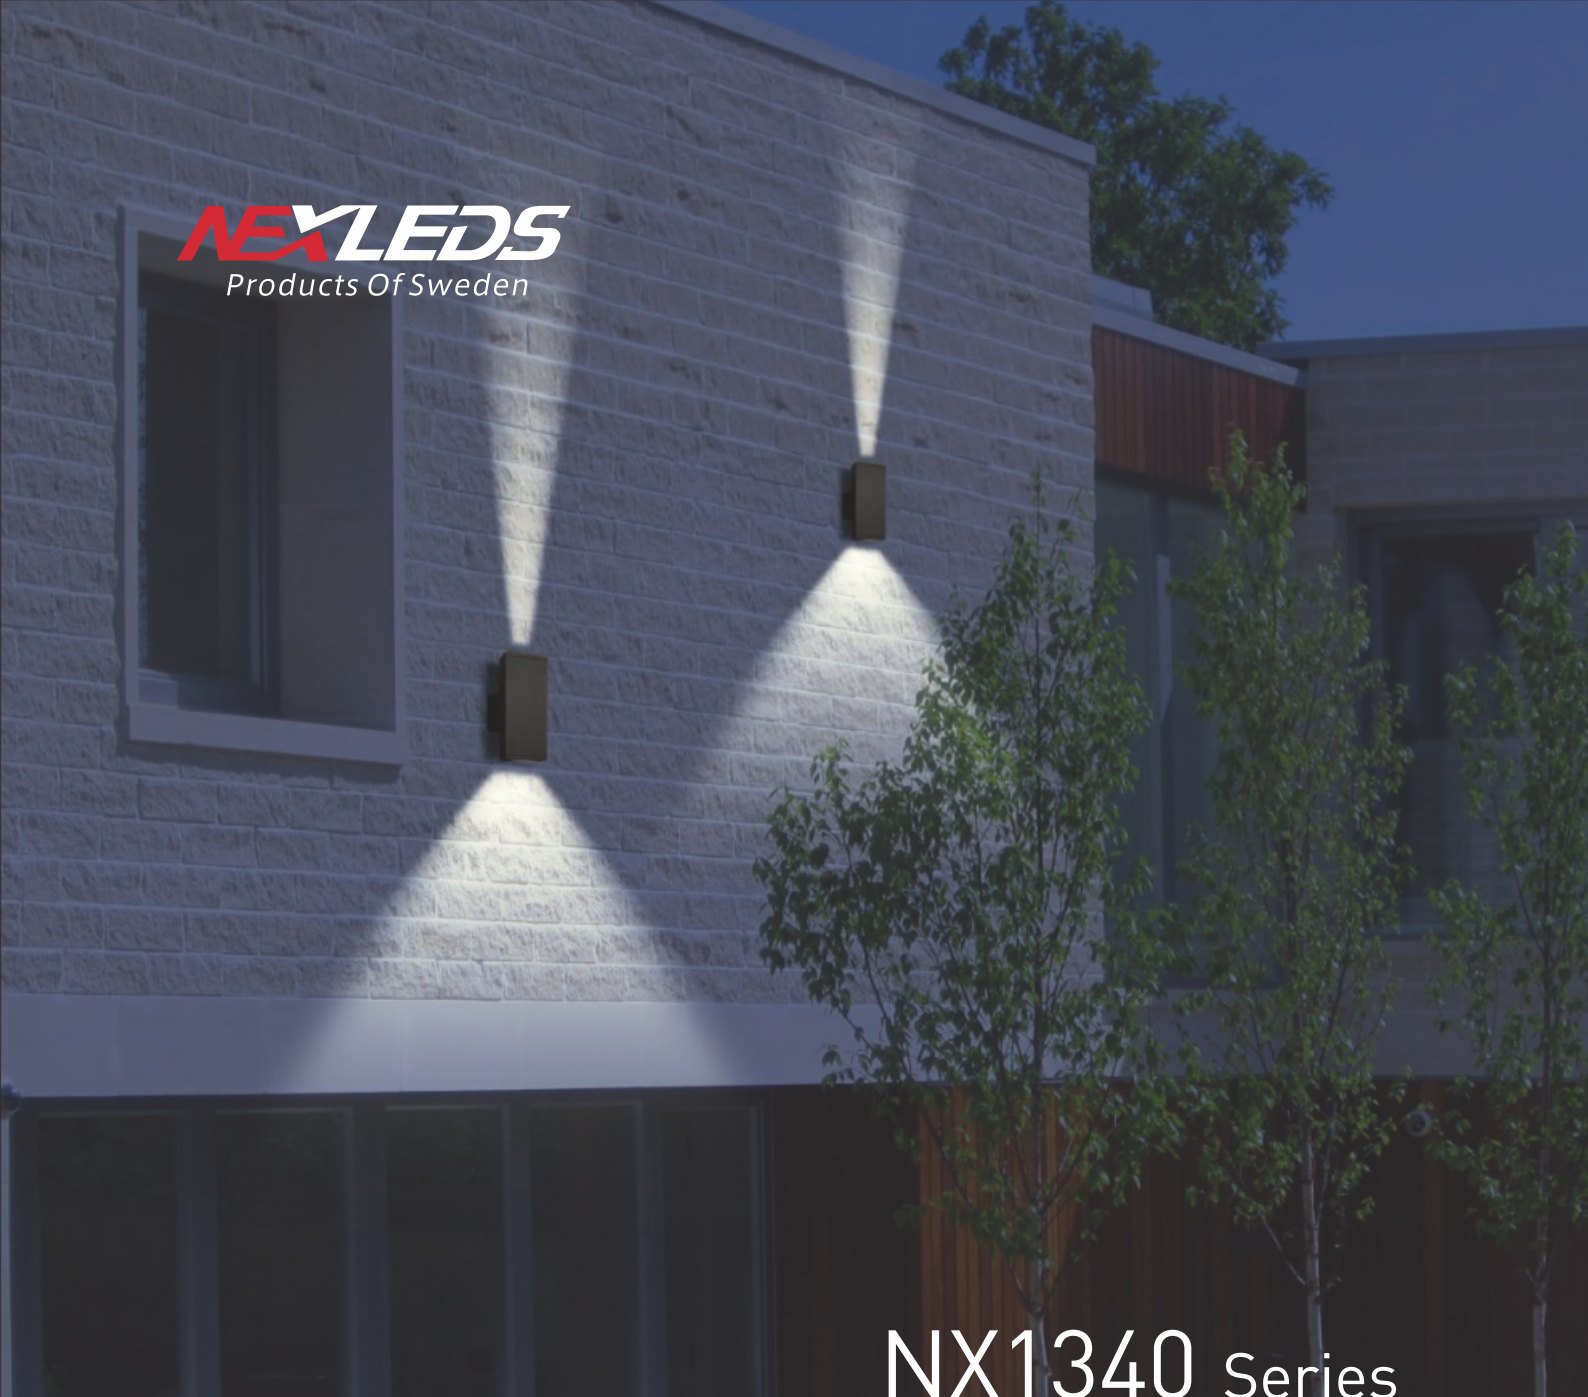

NX1340 Series

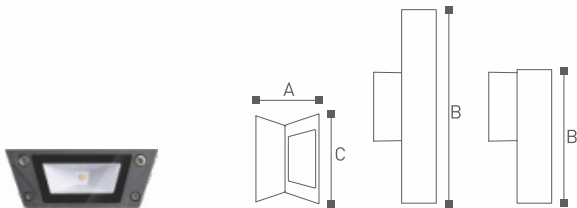

Lighting Technology
Luminaires with LED
with LED integral power supply unit

Material
Aluminium extruded sections;
Die-casting Aluminium;
Tempered glass

Body color
Black, Dark Gray, Sliver Gray

Certification







BIS
 ISO9001-2008 ISO14000  BSCI

LED 7 W	TEMPERATURE 2700K — 6500K
MAX. 640 LUMENS	IP54

	Lamp	Lumen	A	B	C
NX13405	LED 3.5W	320LM	65	170	92
NX13406	LED 7W	640LM	65	200	92



NX1350 Series



Lighting Technology
Luminaires with LED
with LED integral power supply unit

Material
Aluminium extruded sections;
Die-casting Aluminium;
Tempered glass

Body color
Black, Dark Gray, Sliver Gray

Certification







 ISO9001-2008 ISO14000  BSCI

LED 7 W	TEMPERATURE 2700K 6500K
MAX. 640 LUMENS	IP54

	Lamp	Lumen	A	B
NX13503	LED 3.5W	320LM	106	157
NX13504	LED 7W	640LM	106	238



NX1350 Series

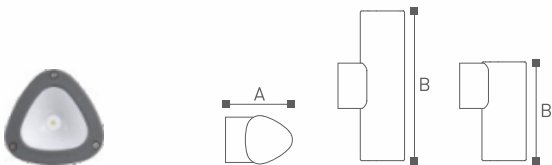

Lighting Technology
Luminaires with LED
with LED integral power supply unit

Material
Aluminium extruded sections;
Die-casting Aluminium;
Tempered glass

Body color
Black, Dark Gray, Silver Gray

Certification






 ISO9001-2008 ISO14000  BSCI

LED 7 W	TEMPERATURE 2700K 6500K
MAX. 640 LUMENS	IP54

	Lamp	Lumen	A	B
NX13505	LED 3.5W	320LM	106	157
NX13506	LED 7W	640LM	106	238
NX13507	GU10 35W		106	157
NX13508	GU10 2x35W		106	238



NX1360 Series



Lighting Technology

Luminaires with E27/B22 lamp holder fixed with energy saving lighting Max.18W



Material


Aluminium; PC; Diffuser

Body color

Black, Dark Gray, Sliver Gray

Certification

CE CB ETL SAA V-ROHS BIS
ISO9001-2008 ISO14000 BSCI

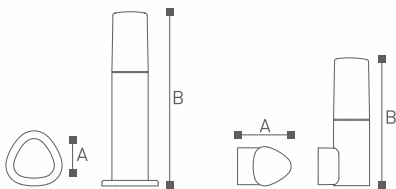

	Lamp	A	B
NX13601	E27 18W	72	300
NX13602	E27 18W	72	500
NX13603	E27 18W	72	800
NX13604	E27 18W	107	250



NX1370 Series



Lighting Technology
Luminaires with LED
with LED integral power supply unit

Material
Aluminium extruded sections;
Die-casting Aluminium; PC; Diffuser

Body color
Black, Dark Gray, Sliver Gray


Certification






 ISO9001-2008 ISO14000  BSCI

LED 7_W	TEMPERATURE 2700K - 6500K
MAX. 520 LUMENS	IP54

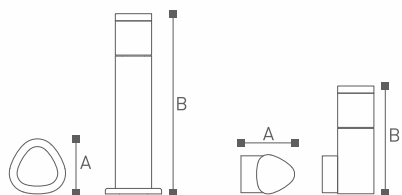

	Lamp	Lumen	A	B
NX13701	LED 7W	520LM	110	300
NX13702	LED 7W	520LM	110	500
NX13703	LED 7W	520LM	110	800
NX13704	LED 7W	520LM	107	200



NX1380 Series



Lighting Technology
Luminaires with LED
with LED integral power supply unit

Material
Aluminium extruded sections;
Die-casting Aluminium; PC; Diffuser

Body color
Black, Dark Gray, Sliver Gray

Certification








 ISO9001-2008 ISO14000  BSCI

LED
7W

TEMPERATURE
2700K
6500K

MAX.
520
LUMENS

IP54

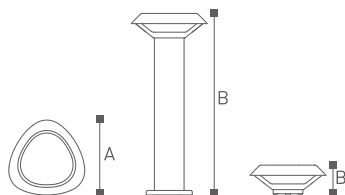

	Lamp	Lumen	A	B
NX13801	LED 7W	520LM	183	300
NX13802	LED 7W	520LM	183	500
NX13803	LED 7W	520LM	183	800
NX13804	LED 7W	520LM	183	73



NX1210 Series



Lighting Technology
Luminaires with LED
with LED integral power supply unit

Material
Aluminium extruded sections;
Die-casting Aluminium; PC; Diffuser

Body color
Black, Dark Gray, Silver Gray

Certification









 ISO9001-2008 ISO14000  BSCI


LED 7W	TEMPERATURE 2700K 6500K
MAX. 520 LUMENS	IP54

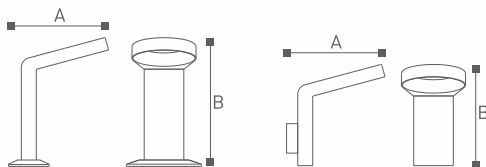

	Lamp	Lumen	A	B
NX12101	LED 7W	520LM	235	300
NX12102	LED 7W	520LM	235	500
NX12103	LED 7W	520LM	235	800
NX12104	LED 7W	520LM	235	250

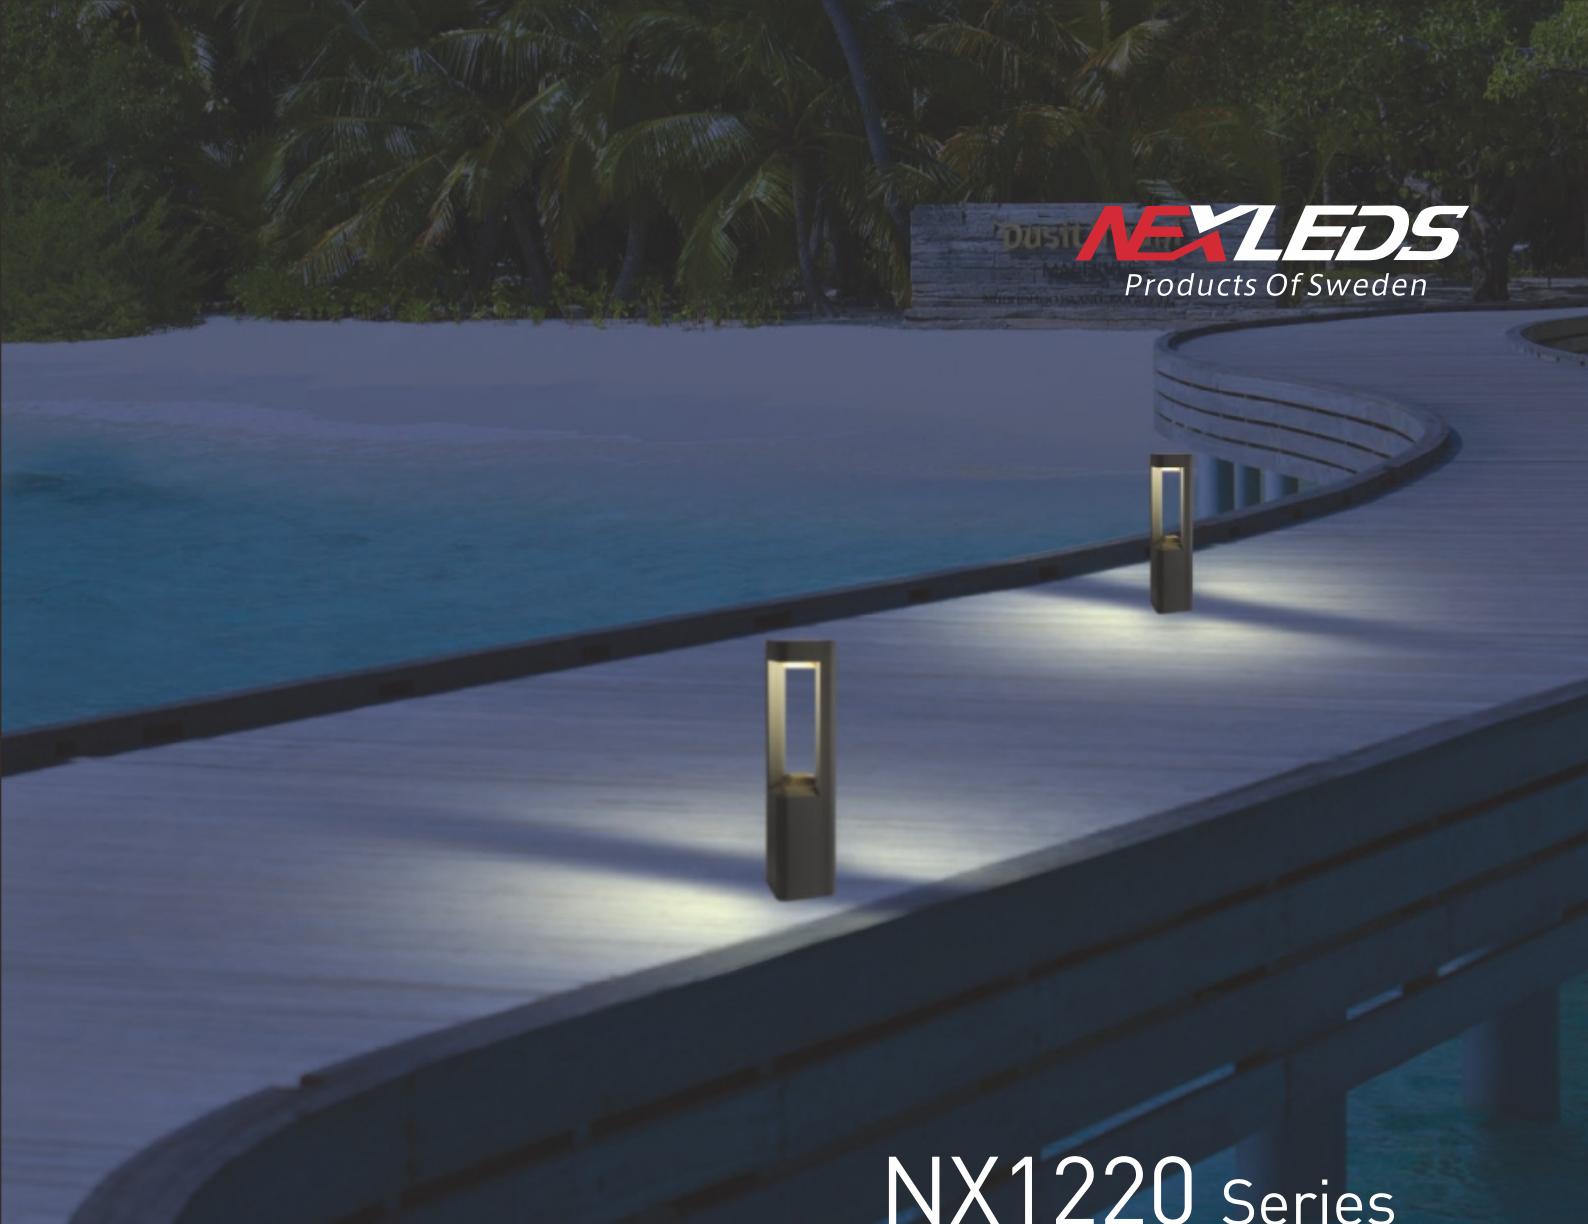

NX1220 Series



Lighting Technology
Luminaires with LED
with LED integral power supply unit

Material
Aluminium extruded sections;
Die-casting Aluminium; PC; Diffuser

Body color
Black, Dark Gray, Sliver Gray

Certification







 ISO9001-2008 ISO14000  BSCI

LED 9W	TEMPERATURE 2700K 6500K
MAX. 900 LUMENS	IP54

	Lamp	Lumen	A	B
NX12201	LED 9W	900LM	150	300
	GX53 11W		150	300
NX12202	LED 9W	900LM	150	500
	GX53 11W		150	500
NX12203	LED 9W	900LM	150	800
	GX53 11W		150	800



NX1220 Series

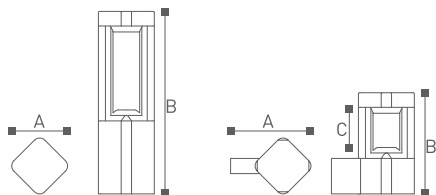

Lighting Technology
Luminaires with LED
with LED integral power supply unit

Material
Aluminium extruded sections;
Die-casting Aluminium; PC; Diffuser

Body color
Black, Dark Gray, Silver Gray

Certification






 ISO9001-2008 ISO14000  BSCI

LED
9W

TEMPERATURE
2700K
6500K

MAX.
900
LUMENS

IP54

	Lamp	Lumen	A	B	C
NX12204	LED 9W	900LM	150	500	260
	GX53 11W		150	500	260
NX12205	LED 9W	900LM	150	800	560
	GX53 11W		150	800	560
NX12206	LED 9W	900LM	200	250	130
	GX53 11W		200	250	130
NX12207	LED 9W	900LM	150	200	100
	GX53 11W		150	200	100



NX1230 Series



Lighting Technology
Luminaires with LED
with LED integral power supply unit

Material
Aluminium extruded sections;
Die-casting Aluminium; PC; Diffuser

Body color
Black, Dark Gray, Sliver Gray

Certification








 ISO9001-2008 ISO14000  BSCI

LED
9W
TEMPERATURE
2700K
6500K

MAX.
820
LUMENS
IP54



	Lamp	Lumen	A	B
NX12301	LED 9W	820LM	120	300
NX12302	LED 9W	820LM	120	500
NX12303	LED 9W	820LM	120	800



NX1230 Series



Lighting Technology
Luminaires with LED
with LED integral power supply unit

Material
Aluminium extruded sections;
Die-casting Aluminium; PC; Diffuser

Body color
Black, Dark Gray, Sliver Gray

Certification








 ISO9001-2008 ISO14000  BSCI

LED 9W	TEMPERATURE 2700K 6500K
MAX. 820 LUMENS	IP54

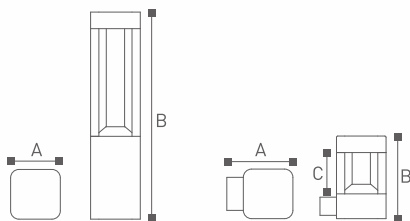

	Lamp	Lumen	A	B	C
NX12304	LED 9W	820LM	120	500	260
NX12305	LED 9W	820LM	120	800	560
NX12306	LED 9W	820LM	170	200	100
NX12307	LED 9W	820LM	120	200	100



NX1240 Series



Lighting Technology

Luminaires with E27/B22 lamp holder fixed with energy saving lighting Max.23W



Material


Aluminium; PC; Diffuser

Body color

Black, Dark Gray, Sliver Gray


Certification

CE CB ETL SAA V-ROHS BIS
ISO9001-2008 ISO14000 BSCI

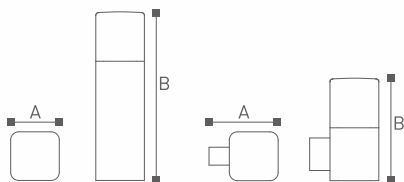


	Lamp	A	B
NX12401	E27 23W	120	300
NX12402	E27 23W	120	500
NX12403	E27 23W	120	800
NX12404	E27 23W	120	250

NEXLEDS
Products Of Sweden



NX1250 Series

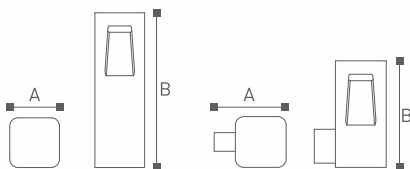

Lighting Technology
Luminaires with LED
with LED integral power supply unit

Material
Aluminium extruded sections;
Die-casting Aluminium; PC; Diffuser

Body color
Black, Dark Gray, Sliver Gray

Certification







 ISO9001-2008 ISO14000  BSCI

LED 9W	TEMPERATURE 2700K 6500K
MAX. 770 LUMENS	IP54

	Lamp	Lumen	A	B
NX12501	LED 9W Two side	770LM	120	300
NX12502	LED 9W Two side	770LM	120	500
NX12503	LED 9W Two side	770LM	120	800
NX12504	LED 9W Two side	770LM	170	250
NX12505	LED 9W Four side	770LM	120	300
NX12506	LED 9W Four side	770LM	120	500
NX12507	LED 9W Four side	770LM	120	800
NX12508	LED 9W Four side	770LM	170	250



NX12602



Lighting Technology
Luminaires with LED
with LED integral power supply unit


Material
Aluminium extruded sections;
Die-casting Aluminium;
Tempered glass

Body color
Black, Dark Gray, Silver Gray

Certification

CE CB ETL SAA V-BEBS BIS
ISO9001-2008 ISO14000 BSCI

LED 13 W	TEMPERATURE 2700K - 6500K
MAX. 1200 LUMENS	IP65

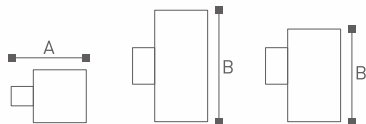

	Lamp	Lumen	A	B
NX12601	LED 7W	600LM	170	200
NX12602	LED 13W	1200LM	170	250



NX12604



Lighting Technology
Luminaires with LED
with LED integral power supply unit

Material
Aluminium extruded sections;
Die-casting Aluminium;
Tempered glass

Body color
Black, Dark Gray, Sliver Gray

Certification








 ISO9001-2008 ISO14000  BSCI

LED 13 W	TEMPERATURE 2700K 6500K
MAX. 1200 LUMENS	IP65

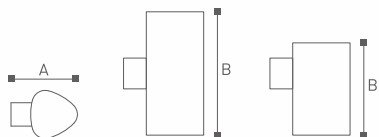

	Lamp	Lumen	A	B
NX12603	LED 7W	600LM	170	200
NX12604	LED 13W	1200LM	170	250

NX1120 Series



Lighting Technology
Luminaires with LED
with LED integral power supply unit

Material
Aluminium extruded sections;
Die-casting Aluminium; PC; Diffuser

Body color
Black, Dark Gray, Sliver Gray

Certification







 ISO9001-2008 ISO14000  BSCI

LED
9W

TEMPERATURE
2700K
6500K

MAX.
820
LUMENS


IP54



	Lamp	Lumen	A	B
NX11201	LED 9W	820LM	125	300
	GX53 11W		125	300
NX11202	LED 9W	820LM	125	500
	GX53 11W		125	500
NX11203	LED 9W	820LM	125	800
	GX53 11W		125	800



NX1120 Series

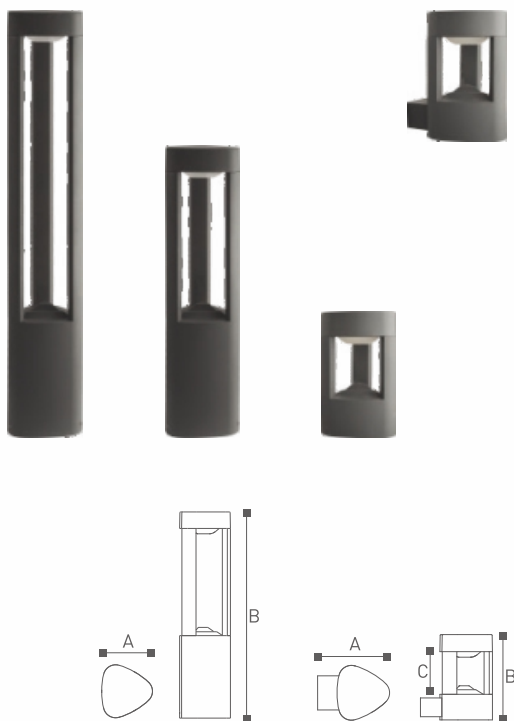

Lighting Technology
Luminaires with LED
with LED integral power supply unit

Material
Die-casting Aluminium; PC; Diffuser

Body color
Black, Dark Gray, Silver Gray

Certification






 ISO9001-2008 ISO14000  BSCI

LED 9W	TEMPERATURE 2700K 6500K
MAX. 820 LUMENS	IP54

	Lamp	Lumen	A	B	C
NX11204	LED 9W	820LM	125	500	260
	GX53 11W		125	500	260
NX11205	LED 9W	820LM	125	800	560
	GX53 11W		125	800	560
NX11206	LED 9W	820LM	170	200	100
	GX53 11W		170	200	100
NX11207	LED 69W	820LM	125	200	100
	GX53 11W		125	200	100



NX1130 Series



Lighting Technology

Luminaires with E27 or B22 lamp holder fixed with energy saving lighting Max.23W



Material


Aluminium alloy; Diffuser PC

Body color

Black, Dark Gray, Sliver Gray

Certification

CE CB ETL SAA VDE BIS
ISO9001-2008 ISO14000 BSCI

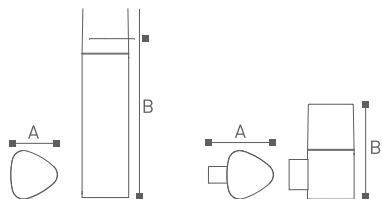

	Lamp	A	B
NX11304	E27 23W	125	300
NX11305	E27 23W	125	500
NX11306	E27 23W	125	800
NX11307	E27 23W	170	250



NX1140 Series



Lighting Technology

Luminaires with E27 or B22 lamp holder fixed with energy saving lighting Max.23W



Material


Aluminium alloy; Diffuser PC

Body color

Black, Dark Gray, Sliver Gray

Certification

CE CB ETL SAA VDE BIS
ISO9001-2008 ISO14000 BSCI

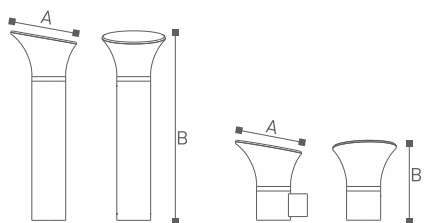

	Lamp	A	B
NX11401	E27 23W	175	300
NX11402	E27 23W	175	500
NX11403	E27 23W	175	800
NX11404	E27 23W	175	200



NX1140 Series



Lighting Technology

Luminaires with E27 or B22 lamp holder fixed with energy saving lighting Max.23W



Material


Aluminium alloy; Diffuser PC

Body color

Black, Dark Gray, Sliver Gray

Certification

CE CB ETL SAA V-ROHS BIS
ISO9001-2008 ISO14000 BSCI

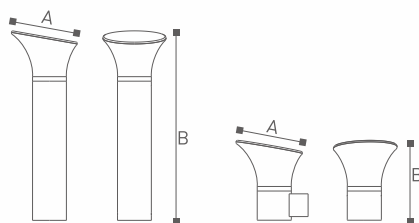

	Lamp	A	B
NX11405	E27 23W	175	300
NX11406	E27 23W	175	500
NX11407	E27 23W	175	800
NX11408	E27 23W	175	200

NEXLEDS
Products Of Sweden



NX1160 Series



Lighting Technology
Luminaires with LED
with LED integral power supply unit

Material
Aluminium extruded sections;
Die-casting Aluminium; PC; Diffuser

Body color
Black, Dark Gray, Silver Gray


Certification







 ISO9001-2008 ISO14000  BSCI


LED 7W	TEMPERATURE 2700K 6500K
MAX. 520 LUMENS	IP54



	Lamp	Lumen	A	B	C
NX11601	LED 7W	520LM	125	800	560
NX11602	LED 7W	520LM	125	800	360
NX11603	LED 7W	520LM	125	800	160

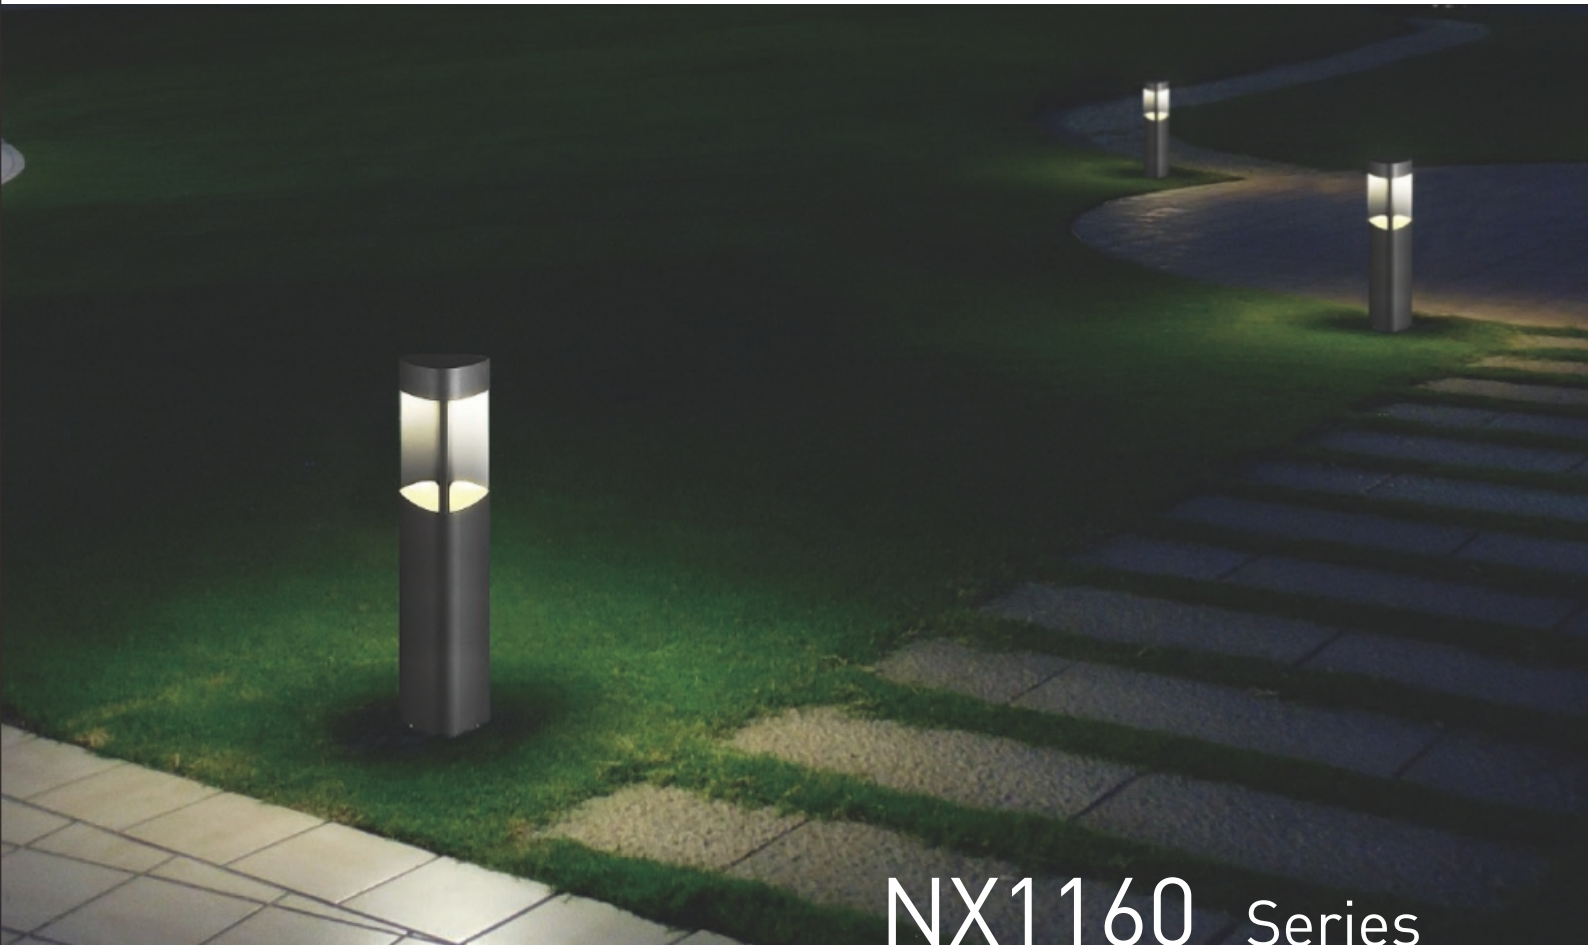

NX1160 Series

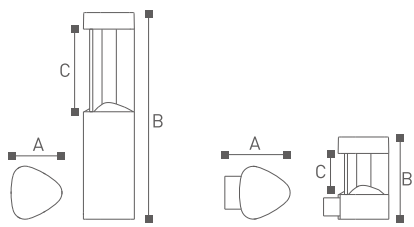

Lighting Technology
Luminaires with LED
with LED integral power supply unit

Material
Aluminium extruded sections;
Die-casting Aluminium; PC; Diffuser

Body color
Black, Dark Gray, Sliver Gray

Certification







 ISO9001-2008 ISO14000  BSCI

LED 7_w	TEMPERATURE 2700K - 6500K
MAX. 520 LUMENS	IP54

	Lamp	Lumen	A	B	C
NX11604	LED 7W	520LM	170	200	100
NX11605	LED 7W	520LM	125	500	400
NX11606	LED 7W	520LM	125	500	260
NX11607	LED 7W	520LM	125	500	160
NX11608	LED 7W	520LM	125	500	160
NX11609	LED 7W	520LM	125	300	130
NX116010	LED 7W	520LM	125	300	160



NX-WW1210 Series


NX-WW12104



NX-WW12105



NX-WW12106



Lighting Technology

Luminaires with CREE LED with LED integral power supply unit

Material

Die-casting Aluminium; PC

Body color

Black, Dark Gray, Silver Gray

Certification








 ISO9001-2008 ISO14000  BSCI

LED
3.5W

TEMPERATURE
2700K
6500K

MAX.
320
LUMENS

IP65

	Lamp	Lumen	A	B
NX-WW12104	LED 3.5W	190LM	66	100
NX-WW12105	LED 3.5W	300LM	66	100
NX-WW12106	LED 3.5W	300LM	66	100




NX-WW1210 Series



NX-WW12107

NX-WW12108

NX-WW12109

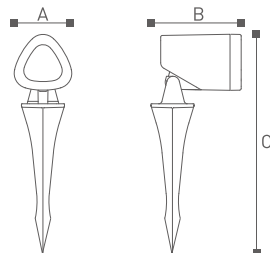

Lighting Technology
Luminaires with CREE LED
with LED integral power supply unit

Material
Die-casting Aluminium; PC

Body color
Black, Dark Gray, Sliver Gray

Certification






 ISO9001-2008 ISO14000  BSCI

LED 3.5W	TEMPERATURE 2700K - 6500K
MAX. 320 LUMENS	IP65

	Lamp	Lumen	A	B	C
NX-WW12107	LED 3.5W	190LM	66	100	278
NX-WW12108	LED 3.5W	300LM	66	100	278
NX-WW12109	LED 3.5W	300LM	66	100	278



NX-WW1210 Series


NX-WW12110



NX-WW12111



NX-WW12112

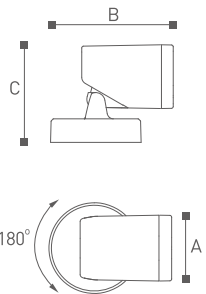

Lighting Technology
Luminaires with CREE LED
with LED integral power supply unit

Material
Die-casting Aluminium; PC

Body color
Black, Dark Gray, Sliver Gray

Certification







 ISO9001-2008 ISO14000  BSCI

LED 3.5W	TEMPERATURE 2700K - 6500K
MAX. 320 LUMENS	IP65

	Lamp	Lumen	A	B	C
NX-WW12110	LED 3.5W	190LM	66	100	110
NX-WW12111	LED 3.5W	300LM	66	100	110
NX-WW12112	LED 3.5W	300LM	66	100	110



NX-WW1211 Series



Lighting Technology
Luminaires with LED
with LED integral power supply unit

Material
Die-casting Aluminium; Tempered glass
PC

Body color
Black, Dark Gray, Silver Gray


Certification






 ISO9001-2008 ISO14000  BSCI

LED 7W	TEMPERATURE 2700K - 6500K
MAX. 500 LUMENS	IP65

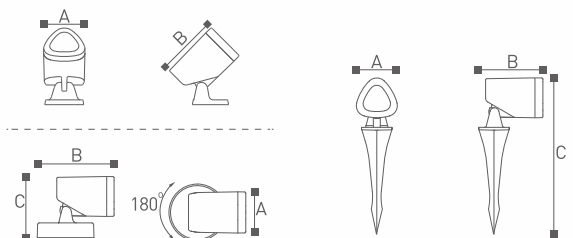

	Lamp	Lumen	A	B	C
NX-WW12113	LED 7W	500LM	66	100	
NX-WW12114	LED 7W	500LM	66	100	110
NX-WW12115	LED 7W	500LM	66	100	278



www.nexleds.se



info@nexleds.se